



CorePro LEDcandle

Corepro Candle ND 4-25W E14 827 B35 CL

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap base	E14 [E14]
EU RoHS compliant	Yes
Nominal lifetime (nom.)	15000 h
Switching cycle	50,000X
Technical type	4-25W

Light Technical	
Colour Code	827 [CCT of 2,700 K]
Luminous flux (nom.)	250 lm
Colour designation	Warm white (WW)
Correlated Colour Temperature (Nom)	2700 K
Luminous efficacy (rated) (nom.)	62.50 lm/W
Colour consistency	<6
Colour rendering index (nom.)	80
LLMF at end of nominal lifetime (nom.)	70 %

Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	4 W
Lamp current (nom.)	35 mA
Wattage equivalent	25 W
Starting time (nom.)	0.5 s

Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.4
Voltage (Nom)	220-240 V

Temperature	
T-Case maximum (nom.)	75 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Lamp Finish	Clear
Bulb shape	B35 [B 35mm]


Approval and Application	
Energy consumption kWh/1,000 hours	4 kWh

Product Data	
Full product code	871869650757500
Order product name	Corepro Candle ND 4-25W E14 827 B35 CL
EAN/UPC – product	8718696507575
Order code	50757500
SAP numerator – quantity per pack	1

CorePro LEDcandle

Numerator – packs per outer box	10
SAP material	929001142202
SAP net weight (piece)	0.040 kg



Dimensional drawing

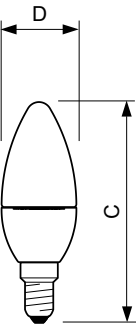

LED ND 4-25W E14 827 220-240V B35 CL


Product	D	C
Corepro Candle ND 4-25W E14 827 B35 CL	35 mm	106 mm

Photometric data

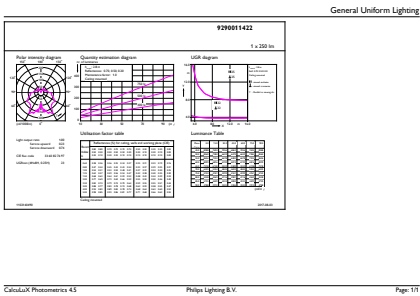

CorePro LEDcandle 4-25W E14 827 CL B35


CorePro LEDcandle 4-25W E14 827 CL B35

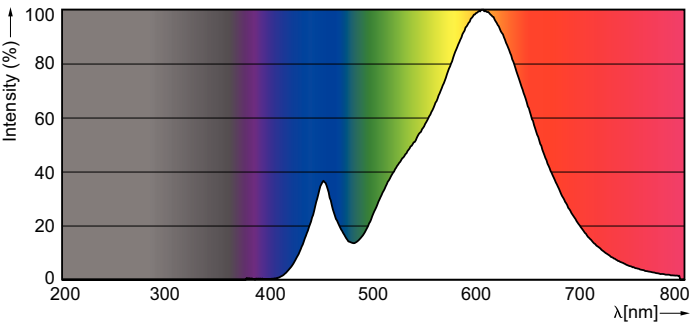


SDPO_LEDCL_0003-Spectral Power distribution

CorePro LEDcandle

Lifetime

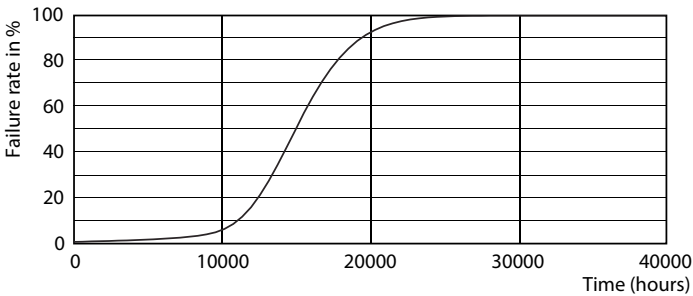

LEDbulb 60W E14 827 FR B38

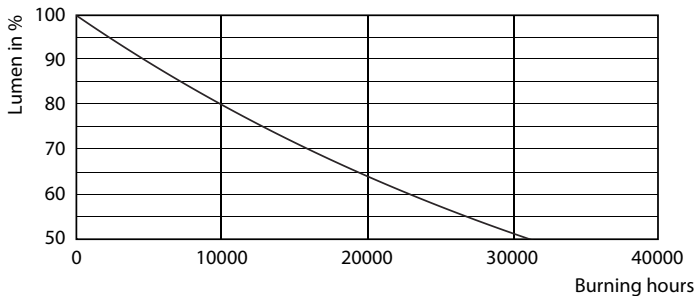

LEDbulb 60W E14 827 FR B38

