



CorePro LEDcandle

Corepro candle ND 5.5-40W E14 827 B35 CL

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.


Product data

General Information		Warm-up time to 60% light (nom.)		0.5 s
Cap base	E14 [E14]	Power factor (nom.)		0.5
EU RoHS compliant	Yes	Voltage (Nom)		220-240 V
Nominal lifetime (nom.)	15000 h	Temperature		
Switching cycle	50,000X	T-Case maximum (nom.)		85 °C
Technical type	5.5-40W	Controls and Dimming		
Light Technical		Dimmable		No
Colour Code	827 [CCT of 2,700 K]	Mechanical and Housing		
Luminous flux (nom.)	470 lm	Lamp Finish		Clear
Colour designation	Warm white (WW)	Bulb shape		B35 [B 35mm]
Correlated Colour Temperature (Nom)	2700 K	Approval and Application		
Luminous efficacy (rated) (nom.)	85.45 lm/W	Energy consumption kWh/1,000 hours		6 kWh
Colour consistency	<6	Product Data		
Colour rendering index (nom.)	80	Full product code		871869645479400
LLMF at end of nominal lifetime (nom.)	70 %	Order product name		Corepro candle ND 5.5-40W E14 827 B35 CL
Operating and Electrical		EAN/UPC – product		8718696454794
Input frequency	50 to 60 Hz	Order code		45479400
Power (Rated) (Nom)	5.5 W	SAP numerator – quantity per pack		1
Lamp current (nom.)	50 mA			
Wattage equivalent	40 W			
Starting time (nom.)	0.5 s			

CorePro LEDcandle

Numerator – packs per outer box	10
SAP material	929001142502
SAP net weight (piece)	0.040 kg



Dimensional drawing

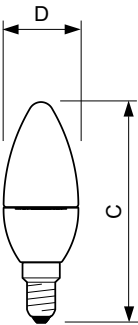

LED ND 5.5-40W E14 827 220-240V B35 CL


Product	D	C
Corepro candle ND 5.5-40W E14 827 B35 CL	35 mm	106 mm

Photometric data

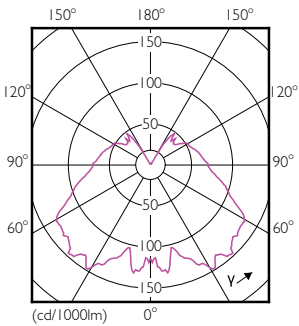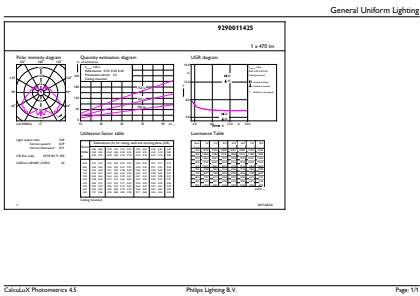

CorePro LEDcandle 40W E14 827 CL B35 ND


CorePro LEDcandle 40W E14 827 CL B35 ND

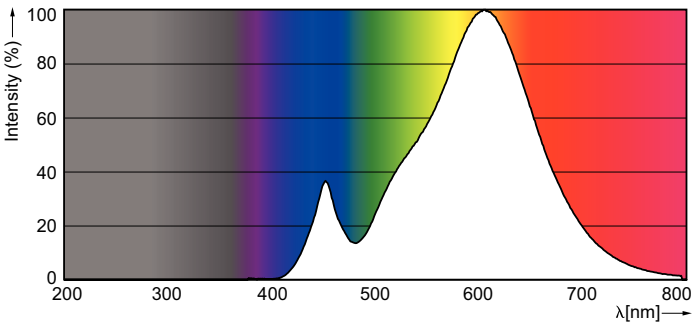


SDPO_LEDCL_0003-Spectral Power distribution

CorePro LEDcandle

Lifetime

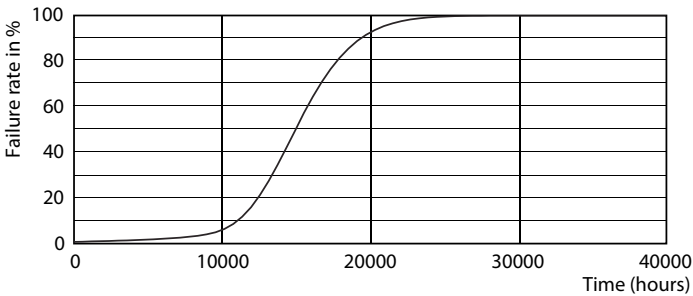

LEDbulb 60W E14 827 FR B38

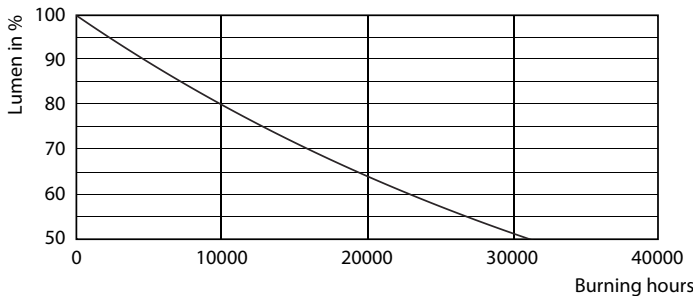

LEDbulb 60W E14 827 FR B38

