

# MASTER VALUE LEDs pot LV



### MASTER LED SPOT VLE D 7.5-50W MR16 940 36D

Philips MASTER VALUE MR16 is the series of Low Voltage (12VAC) Halogen MR16 replacements. Not only does it employs Philips' patented solution to guarantee the broadest possible compatibility with standard 12V Halogen electronic transformers. It also delivers beam intensity which is equivalent to the 50W Philips Halogen MR16 lamps. The form-factor of Philips MASTER Value LED MR16 guarantees a 100% form on the back-side of the lamp (exact form with Halogen lamps.)

### **Warnings and Safety**

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- · Not intended for use with emergency light fixtures or exit lights

#### **Product data**

General information	
Cap-Base	GU5.3 [ GU5.3]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Flux measurement reference	Narrow Cone
Light technical	
Color Code	940 [ CCT of 4000K]
Beam Angle (Nom)	36 °
Luminous Flux (Nom)	660 lm
Luminous Intensity (Nom)	1500 cd
Color Designation	Cool White (CW)

Correlated Color Temperature (Nom)	4000 K	
Luminous Efficacy (rated) (Nom)	88.00 lm/W	
Color Consistency	<6	
Color Rendering Index (Nom)	90	
LLMF At End Of Nominal Lifetime (Nom) 70 %		
Luminous Flux in 90° Cone (Rated)	660 lm	
Operating and electrical		
Input Frequency	- Hz	
Power (Nom)	7.5 W	
Lamp Current (Nom)	660 mA	
Wattage Equivalent	50 W	
Starting Time (Nom)	0.5 s	


Datasheet, 2022, July 28 data subject to change

## **MASTER VALUE LEDspot LV**

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	ac electronic 12 V
Temperature	
T-Case Maximum (Nom)	95℃
Controls and dimming	
Dimmable	Only with specific dimmers
Mechanical and housing	
Bulb Shape	MR16 [ 2inch/50mm]
Approval and application	
Energy Efficiency Class	F
Suitable For Accent Lighting	Yes

Energy Consumption kWh/1000 h	8 kWh
<b>EPREL Registration Number</b>	453182
Product data	
Full product code	871951430736000
Order product name	MASTER LED SPOT VLE D 7.5-50W MR16 940
	36D
EAN/UPC - Product	8719514307360
Order code	929002493402
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002493402
Copy Net Weight (Piece)	0.045 kg


### Dimensional drawing




MASTER LED SPOT VLE D 7.5-50W MR16 940 36D

# Product D C MASTER LED SPOT VLE D 7.5-50W MR16 940 36D 50.5 mm 45.5 mm

### Photometric data

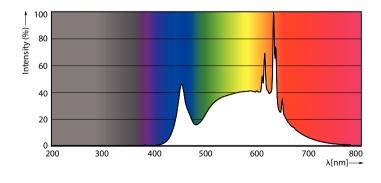


LEDspots MAS 7,5W MR16 GU5,3 940 36D



LEDspots MAS 7,5W MR16 GU5,3 940 36D


### **MASTER VALUE LEDspot LV**


### Photometric data



LEDspots MAS 7,5W MR16 GU5,3 940 36D

### Lifetime

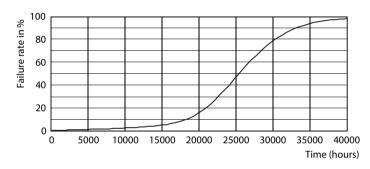

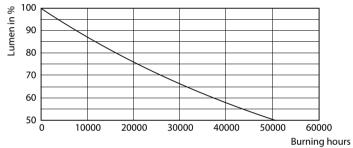

Life Expectancy Diagram

Lumen Maintenance Diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.