Classic filament LEDbulbs

CLA LEDBulb DT 5-40W B22 CRI90 A60 CL

Featuring a classic heritage design, Classic filament LED bulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long-lasting LED technology. They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light bulbs.

Product data

General Information	
Cap base	B22 [B22]
EU RoHS compliant	Yes
Nominal lifetime (nom.)	15000 h
Switching cycle	20,000X
Technical type	5-40W

Light Technical	
Colour Code	927-922 [CCT of 2,700 K-2,200 K]
Beam Angle (Nom)	270 °
Luminous flux (nom.)	470 lm
Colour designation	Warm Glow (WG)
Correlated Colour Temperature (Nom)	2700 2200 K
Luminous efficacy (rated) (nom.)	94.00 lm/W
Colour consistency	<6
Colour rendering index (nom.)	90
LLMF at end of nominal lifetime (nom.)	70 %

Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	5 W
Lamp current (nom.)	32 mA
Wattage equivalent	40 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.7
Voltage (Nom)	220-240 V

Temperature	
T-Case maximum (nom.)	50 °C

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Lamp Finish	Clear
Bulb shape	A60 [A 60mm]

Classic filament LEDbulbs

Approval and Application	
Energy consumption kWh/1,000 hours	5 kWh

Product Data	
Full product code	871869977120100
Order product name	CLA LEDBulb DT 5-40W B22 CRI90 A60 CL
EAN/UPC – product	8718699771201

Order code	77120100
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929002391902
SAP net weight (piece)	0.030 kg

Dimensional drawing



Product	D	C
CLA LEDBulb DT 5-40W B22 CRI90 A60 CL	60 mm	104 mm

A60 230V 6-40W 470lm 2700-2200K B22 D CL

Photometric data



LEDbulb CLA 5W A60 B22 927 922 CL

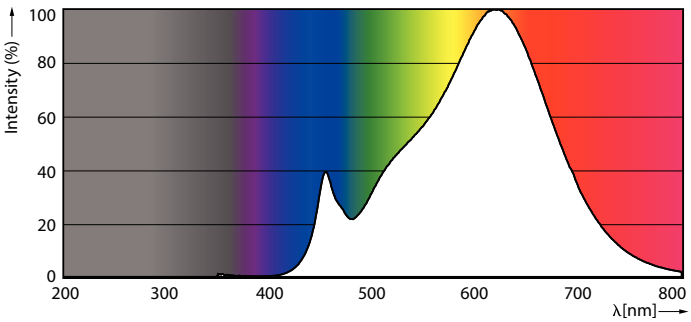

LEDbulb CLA 5W A60 E27 927 922 CL



LEDbulb CLA WGD CRI90

Classic filament LEDbulbs

Lifetime

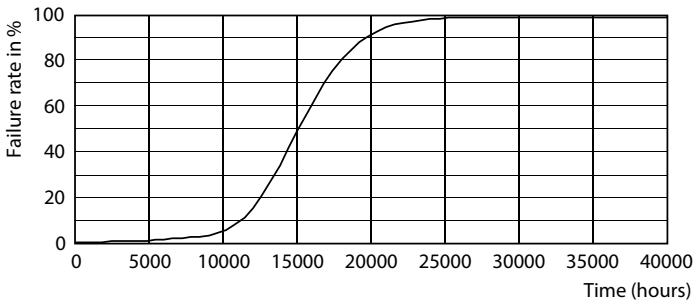

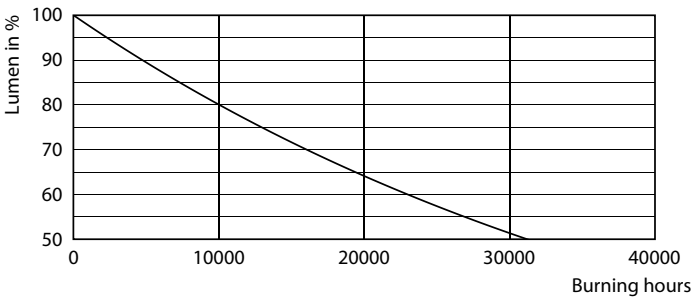

15K LED

15K LMP