


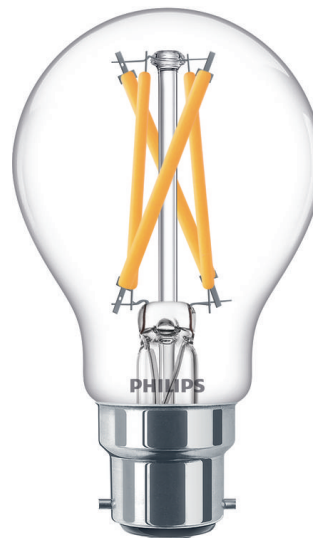

# Classic filament LEDbulbs

## CLA LEDBulb DT 7-60W B22 CRI90 A60 CL

Featuring a classic heritage design, Classic filament LED bulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long-lasting LED technology. They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light bulbs.

### Product data

| General Information     |            |
|-------------------------|------------|
| Cap base                | B22 [ B22] |
| EU RoHS compliant       | Yes        |
| Nominal lifetime (nom.) | 15000 h    |
| Switching cycle         | 20,000X    |
| Technical type          | 7-60W      |

| Light Technical                        |                                   |
|----------------------------------------|-----------------------------------|
| Colour Code                            | 927-922 [ CCT of 2,700 K-2,200 K] |
| Beam Angle (Nom)                       | 270 °                             |
| Luminous flux (nom.)                   | 806 lm                            |
| Colour designation                     | Warm Glow (WG)                    |
| Correlated Colour Temperature (Nom)    | 2700 2200 K                       |
| Luminous efficacy (rated) (nom.)       | 115.00 lm/W                       |
| Colour consistency                     | <6                                |
| Colour rendering index (nom.)          | 90                                |
| LLMF at end of nominal lifetime (nom.) | 70 %                              |

| Operating and Electrical |             |
|--------------------------|-------------|
| Input frequency          | 50 to 60 Hz |

|                                  |           |
|----------------------------------|-----------|
| Power (Rated) (Nom)              | 7 W       |
| Lamp current (nom.)              | 40 mA     |
| Wattage equivalent               | 60 W      |
| Starting time (nom.)             | 0.5 s     |
| Warm-up time to 60% light (nom.) | 0.5 s     |
| Power factor (nom.)              | 0.7       |
| Voltage (Nom)                    | 220-240 V |

| Temperature           |       |
|-----------------------|-------|
| T-Case maximum (nom.) | 50 °C |


| Controls and Dimming |     |
|----------------------|-----|
| Dimmable             | Yes |

| Mechanical and Housing |               |
|------------------------|---------------|
| Lamp Finish            | Clear         |
| Bulb shape             | A60 [ A 60mm] |

Classic filament LEDbulbs

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Approval and Application           |                                       |
| Energy consumption kWh/1,000 hours | 7 kWh                                 |
| Product Data                       |                                       |
| Full product code                  | 871869977122500                       |
| Order product name                 | CLA LEDBulb DT 7-60W B22 CRI90 A60 CL |
| EAN/UPC – product                  | 8718699771225                         |

Dimensional drawing

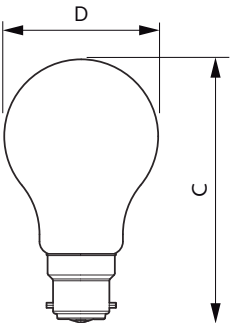


A60 230V 9-60W 806lm 2700-2200K B22 D CL


|                                   |              |
|-----------------------------------|--------------|
| Order code                        | 77122500     |
| SAP numerator – quantity per pack | 1            |
| Numerator – packs per outer box   | 10           |
| SAP material                      | 929002392002 |
| SAP net weight (piece)            | 0.030 kg     |

| Product                               | D     | C      |
|---------------------------------------|-------|--------|
| CLA LEDBulb DT 7-60W B22 CRI90 A60 CL | 60 mm | 104 mm |


Photometric data

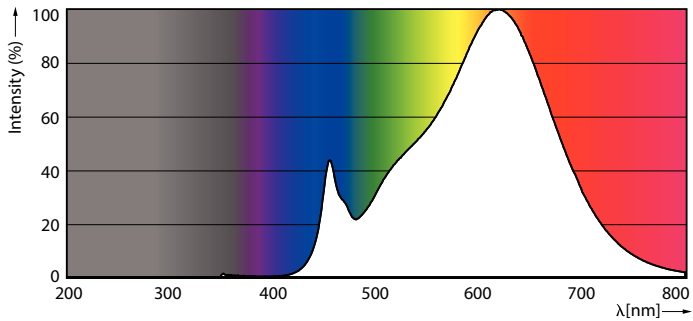

LEDbulb CLA 7W A60 E27 927 922 CL




LEDbulb CLA WGD CRI90




LEDbulb CLA 7W A60 B22 927 922 CL

Classic filament LEDbulbs

Lifetime

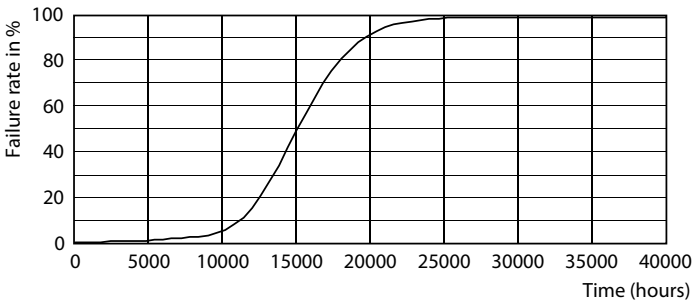

15K LED

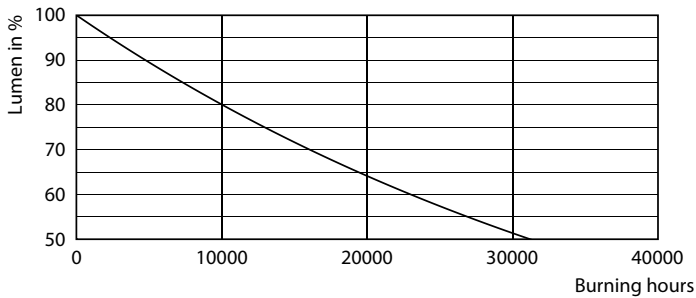

15K LMP

