

# Classic filament LED candles and lustres

## Classic LEDCandleDT 3.2-25W E14 CRI90 B35CL

Featuring a classic heritage design, filament LED candles and lustres combine the familiar shapes of classic incandescent candles or lustres with the benefits of long-lasting LED technology. They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light candles and lustres.

### Product data


| General Information                    |                                   |
|----------------------------------------|-----------------------------------|
| Cap base                               | E14 [ E14]                        |
| EU RoHS compliant                      | Yes                               |
| Nominal lifetime (nom.)                | 15000 h                           |
| Switching cycle                        | 20,000X                           |
| Technical type                         | 3.2-25W                           |
| Light Technical                        |                                   |
| Colour Code                            | 927-922 [ CCT of 2,700 K-2,200 K] |
| Beam Angle (Nom)                       | 270 °                             |
| Luminous flux (nom.)                   | 250 lm                            |
| Colour designation                     | Warm Glow (WG)                    |
| Correlated Colour Temperature (Nom)    | 2700 2200 K                       |
| Luminous efficacy (rated) (nom.)       | 78.00 lm/W                        |
| Colour consistency                     | <6                                |
| Colour rendering index (nom.)          | 90                                |
| LLMF at end of nominal lifetime (nom.) | 70 %                              |
| Operating and Electrical               |                                   |
| Input frequency                        | 50 to 60 Hz                       |

| Power (Rated) (Nom)              | 3.2 W         |
|----------------------------------|---------------|
| Lamp current (nom.)              | 17 mA         |
| Wattage equivalent               | 25 W          |
| Starting time (nom.)             | 0.5 s         |
| Warm-up time to 60% light (nom.) | 0.5 s         |
| Power factor (nom.)              | 0.7           |
| Voltage (Nom)                    | 220-240 V     |
| Temperature                      |               |
| T-Case maximum (nom.)            | 45 °C         |
| Controls and Dimming             |               |
| Dimmable                         | Yes           |
| Mechanical and Housing           |               |
| Lamp Finish                      | Clear         |
| Bulb shape                       | B35 [ B 35mm] |

Classic filament LED candles and lustres

|                                    |                                             |
|------------------------------------|---------------------------------------------|
| Approval and Application           |                                             |
| Energy consumption kWh/1,000 hours | 4 kWh                                       |
| Product Data                       |                                             |
| Full product code                  | 871869977058700                             |
| Order product name                 | Classic LEDCandleDT 3.2-25W E14 CRI90 B35CL |
| EAN/UPC – product                  | 8718699770587                               |

Dimensional drawing

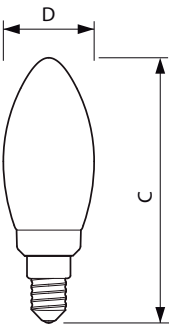


B35 230V 4-25W 250lm 2700-2200K E14 D CL


|                                   |              |
|-----------------------------------|--------------|
| Order code                        | 77058700     |
| SAP numerator – quantity per pack | 1            |
| Numerator – packs per outer box   | 10           |
| SAP material                      | 929002393202 |
| SAP net weight (piece)            | 0.010 kg     |

| Product                                     | D     | C     |
|---------------------------------------------|-------|-------|
| Classic LEDCandleDT 3.2-25W E14 CRI90 B35CL | 35 mm | 99 mm |


Photometric data

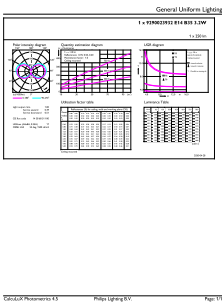

LEDbulb CLA 3,2W B35 E14 927 922 CL

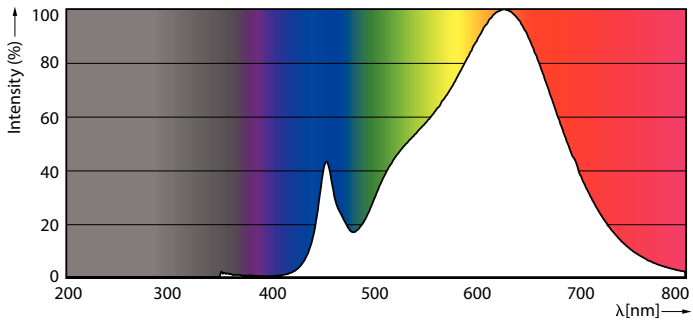


LEDbulb CLA 3,2W B35 E14 927 922 CL




LEDbulb CLA WGD CRI90

Classic filament LED candles and lustres

Lifetime

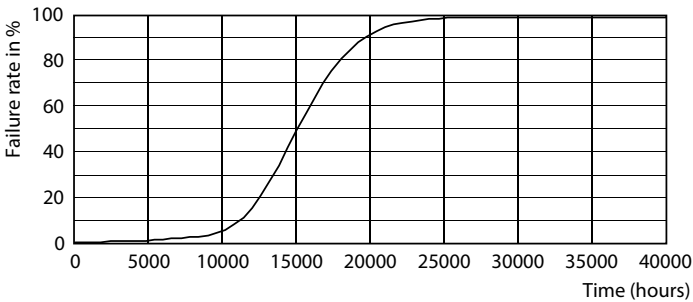

15K LED

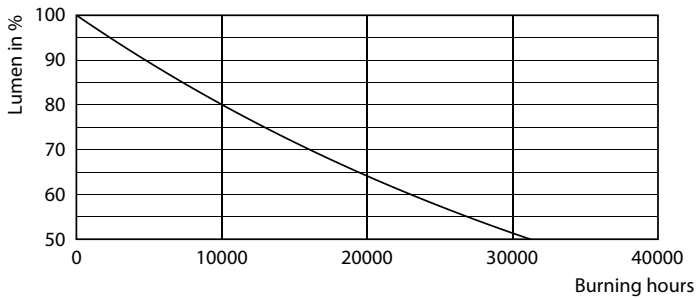

15K LMP

