


Product Code: CU2RCDD100A

Description: 2 Pole 100A 100mA Time Delay RCD

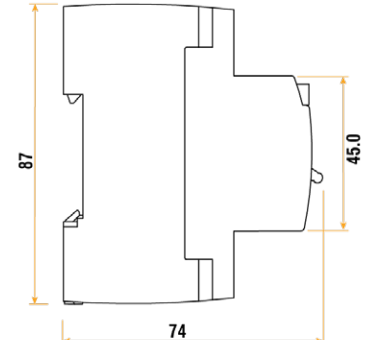

### General Information

|                                           |                               |                              |
|-------------------------------------------|-------------------------------|------------------------------|
| Dimensions (mm)                           | 35.6 (W) x 87 (H) x 74 (D)    |                              |
| Finish                                    | Light Grey (RAL 7035)         |                              |
| Rated Operational Voltage (V~) (Ue)       | 230                           |                              |
| Frequency (Hz)                            | 50/60                         |                              |
| Maximum Rated Current (A) (In)            | 100                           |                              |
| Impulse Withstand Voltage (Uimp)          | 4000                          |                              |
| Type                                      | S                             |                              |
| Rated Making & Breaking Capacity (A) (Im) | 1000                          |                              |
| Tripping Current (mA) (in)                | 100                           |                              |
| Residual Non-Operating Current (IΔn)      | 0.5                           |                              |
| Endurance Operations                      | 2000 'ON' & 1000 'OFF' Cycles |                              |
| Trip Type                                 | Electro-Magnetic Release      |                              |
| Device Terminals                          | Screwed Lug & Pin             |                              |
| RCD Terminal Capacity (mm²)               | 35                            | RCD Terminal Torque (Nm) 2.5 |
| Number Of Poles                           | 2 (1+N)                       |                              |
| Ingress Protection                        | IP20                          |                              |
| Operational Temperature (°C)              | -25 to +40                    |                              |
| Warranty (Years)                          | 3                             |                              |
| Standards                                 | BS EN 61008-1                 |                              |