

NEW

7 YEAR WARRANTY

LINCOLN

A TP(a) rated, feature-rich LED fitting offering an alternative aesthetic to more common 600x600 panels



STANDARD OR SELF-TEST EMERGENCY CONVERSION PACK WITH LITHIUM (LiFePO₄) BATTERY - SEE PAGE 23



IP40

L80
100,000

SDCM <3

APPLICATIONS

- General commercial use

CONSTRUCTION

- Aluminium / steel construction
- Painted white RAL9016 finish
- TP(a) rated micro-prismatic controller for UGR<19 compliant lighting schemes
- Supplied complete with loop-in / loop-out connection block for quick installation
- For 15-24mm exposed T ceilings

TECHNICAL DETAILS


- Available in 2 wattages
 - 18.3W, 2,130 lm, 116 l.m/c.W (Suffix LO)
 - 27.5W, 3,200 lm, 116 l.m/c.W
- CRI >80
- CCT 4000K
- Branded ENEC approved, flicker free, remote mounted LED driver

OPTIONS

EMERGENCY Plug-in lithium emergency conversion packs. To be ordered separately, as listed below.

SPECIALIST EMERGENCY DALI Addressable Emergency (Suffix DAM3) options available.

DIMMING DD (DALI or Switch Dim) or CF (Corridor Function) available. Add suffix DD or CF as required.

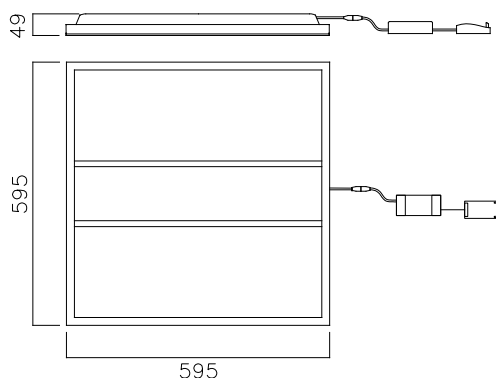

ORDER CODE	DESCRIPTION
NLN/66/840	Lincoln LED UGR<19 TP(a) Recessed Modular 600X600 840
NLN/66/LO/840	Lincoln LED UGR<19 TP(a) Recessed Modular 600X600 LO 840
ACCESSORIES	
N/REC/M3/PACK/V2	M3 Pack V2 LiFePO ₄ for Recessed Product Ranges
N/REC/STM3/PACK/V2	M3 Pack V2 Self-test LiFePO ₄ for Recessed Product Ranges