

FLSMD SITE FLOODS

MULTI-VOLTAGE

FLSMD is a range of tough and robust floodlights designed for site applications. Featuring a multi-voltage supply driver, FLSMD can be used in virtually any project.



Features


- Symmetrical 120° distribution
- Convenient multi-voltage drivers
- Tough die-cast construction
- Pre-wired with 1m cable



Specification


Material:	Body: Die-Cast Aluminium Lens: Tempered Glass
Colour Temperature:	6500K
Colour Finish:	Yellow
CRI	Ra70
LED Lifetime:	35,000 Hours
Beam Angle:	120° Symmetrical
IP Rating:	IP65
IK Rating:	IK07
Working Temperature:	-20°C to 40°C
Power Factor	0.9
Electrical Class:	Class I
Guarantee:	3 Years

Dimensions

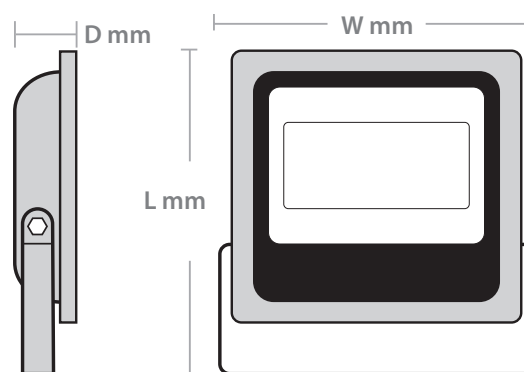

Product Code	Dimensions
FLSMD50Y-1	L: 310mm, W: 310mm, D: 65mm
FLSMD100Y-1	L: 330mm, W: 320mm, D: 90mm
FLSMD150Y-1	L: 365mm, W: 370mm, D: 94mm
FLSMD200Y-1	L: 425mm, W: 410mm, D: 110mm

Product Code	Description	Wattage	Lumen Output	Efficacy	Net Weight	Barcodes
FLSMD50Y-1	FLSMD Site Floodlight	50W	4000 lm	80 lm/W	2.24	5055807618564
FLSMD100Y-1	FLSMD Site Floodlight	100W	8000 lm	80 lm/W	3.64	5055807620116
FLSMD150Y-1	FLSMD Site Floodlight	150W	12000 lm	80 lm/W	4.8	5055807620123
FLSMD200Y-1	FLSMD Site Floodlight	200W	16000 lm	80 lm/W	7.6	5055807620130



FLSMD50Y-1



FLSMD100Y-1




FLSMD150Y-1




FLSMD200Y-1

Light Distribution Curve

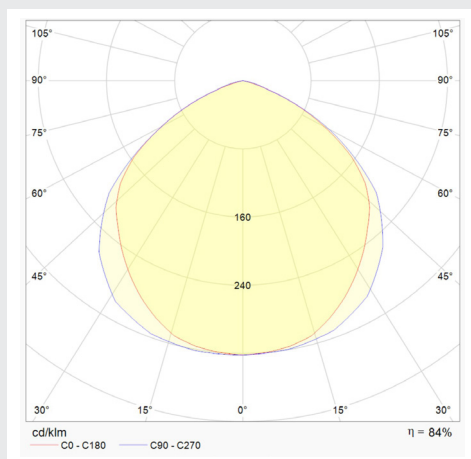UK
CA

CE


www.redarrowelectrical.co.uk