


WPS

SLIMLINE WALLPACK

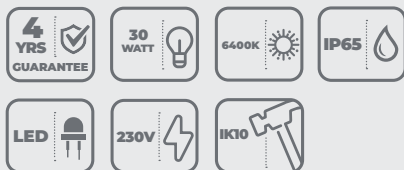

Robust and resilient, the WPS range of wallpacks is suitable for any exterior area lighting application. The slimline design can also be supplied with integral emergency and photocell options.

Features


- Robust IK10 and IP65 rated, ideal for exposed locations
- Unobtrusive, slim design
- Emergency and photocell options



Specification

Material:	Body: Aluminium Diffuser: Polycarbonate
Colour Temperature:	6400K
Colour Finish:	Black
CRI	Ra>80
LED Lifetime:	L70B50 50,000 Hrs
IP Rating:	IP65
IK Rating:	IK10
Working Temperature:	-20°C to 45°C (EM 0°C to 45°C)
Power Factor	>0.9
Emergency Battery Type	Lithium
Electrical Class	Class I
Guarantee:	4 Years (Emergency Batteries 1 Year)

Dimensions



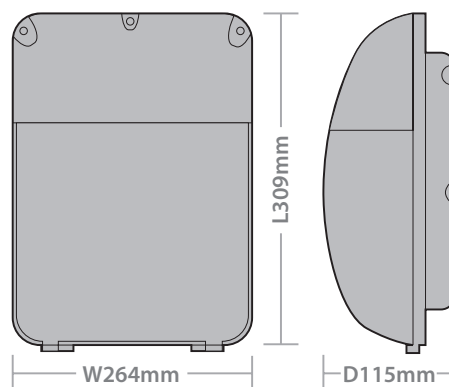


Product Code	Description	Wattage	Lumen Output	Emergency Lumen Output	Efficacy	Weight (Kg)	Barcodes
WPS30	WPS	30W	2600 lm	-	87 lm/W	1.8	5055807617642
WPS30E	WPS c/w 3Hr Emergency	30W	2600 lm	220 lm	87 lm/W	2	5055807617659
WPS30PC	WPS c/w Photocell	30W	2600 lm	-	87 lm/W	1.8	5055807617673
WPS30EPC	WPS c/w 3Hr Emergency & Photocell	30W	2600 lm	220 lm	87 lm/W	2	5055807617666

Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	2.5	2.5	1.5	1.5	2.5	2.5
WPS Wallpacks	10	25	42	64	100	42	70	109	166

Light Distribution Curve

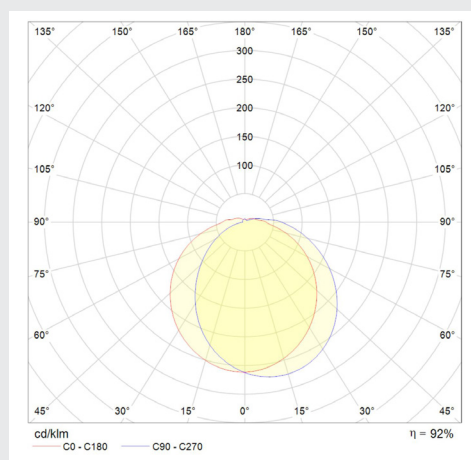

www.redarrowelectrical.co.uk