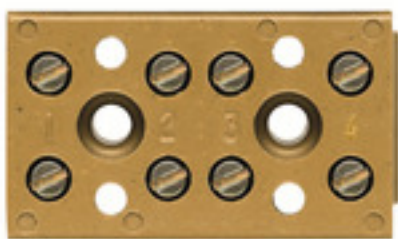


**BK 4 CRN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

Multi-pole terminal strips are suitable for wiring in junction boxes and small distribution boxes. The different numbers of poles offer the possibilities of direct mounting inside the housings.

**General ordering data**

|            |                                                                                                                                            |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Version    | Multipin terminal strip, Single- and multi-pole terminal strip, Rated cross-section: 4 mm <sup>2</sup> , Screw connection, Direct mounting |
| Order No.  | <a href="#">0625 120000</a>                                                                                                                |
| Type       | BK 4 CRN                                                                                                                                   |
| GTIN (EAN) | 4008190013875                                                                                                                              |
| Qty.       | 100 pc(s).                                                                                                                                 |

**BK 4 CRN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |        |                 |            |
|------------|--------|-----------------|------------|
| Depth      | 20 mm  | Depth (inches)  | 0.787 inch |
| Height     | 38 mm  | Height (inches) | 1.496 inch |
| Width      | 22 mm  | Width (inches)  | 0.866 inch |
| Net weight | 27.2 g |                 |            |

**Temperatures**

|                                  |                |                                  |        |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature              | -25 °C...55 °C | Continuous operating temp., min. | -60 °C |
| Continuous operating temp., max. | 130 °C         |                                  |        |

**Material data**

|                           |          |        |               |
|---------------------------|----------|--------|---------------|
| Material                  | KrG      | Colour | medium yellow |
| UL 94 flammability rating | V-0, 5VA |        |               |

**System specifications**

|         |                        |                          |    |
|---------|------------------------|--------------------------|----|
| Version | For the mounting rails | End cover plate required | No |
|---------|------------------------|--------------------------|----|

**Additional technical data**

|                          |                 |                     |                 |
|--------------------------|-----------------|---------------------|-----------------|
| Explosion-tested version | No              | Installation advice | Direct mounting |
| Type of mounting         | Direct mounting |                     |                 |

**CSA rating data**

|                               |                |                               |        |
|-------------------------------|----------------|-------------------------------|--------|
| Certificate No. (CSA)         | 200039-2165696 | Current size B (CSA)          | 10 A   |
| Current size D (CSA)          | 10 A           | Voltage size B (CSA)          | 300 V  |
| Voltage size D (CSA)          | 300 V          | Wire cross section max. (CSA) | 12 AWG |
| Wire cross section min. (CSA) | 22 AWG         |                               |        |

**Conductors for clamping (rated connection)**

|                                                                                         |                      |                                                                                         |                     |
|-----------------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------------|---------------------|
| Blade size                                                                              | 4.0 x 0.8 mm         | Clamping range, max.                                                                    | 4 mm <sup>2</sup>   |
| Clamping range, min.                                                                    | 0.33 mm <sup>2</sup> | Clamping screw                                                                          | M 3                 |
| Connection cross-section, stranded, max.                                                | 4 mm <sup>2</sup>    | Connection cross-section, stranded, min.                                                | 1.5 mm <sup>2</sup> |
| Connection direction                                                                    | on side              | Gauge to IEC 60947-1                                                                    | A3                  |
| Number of connections                                                                   | 8                    | Stripping length                                                                        | 8 mm                |
| Tightening torque, max.                                                                 | 0.6 Nm               | Tightening torque, min.                                                                 | 0.5 Nm              |
| Torque level with DMS electric screwdriver                                              | 2                    | Type of connection                                                                      | Screw connection    |
| Wire connection cross section AWG, max.                                                 | AWG 12               | Wire connection cross section AWG, min.                                                 | AWG 22              |
| Wire connection cross section, finely stranded, max.                                    | 4 mm <sup>2</sup>    | Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 4 mm <sup>2</sup>    | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 4 mm <sup>2</sup>    | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, solid core, max.                                         | 4 mm <sup>2</sup>    | Wire connection cross-section, solid core, min.                                         | 0.5 mm <sup>2</sup> |

## BK 4 CRN

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## General

|                                         |                 |                                         |        |
|-----------------------------------------|-----------------|-----------------------------------------|--------|
| Installation advice                     | Direct mounting | Number of poles                         | 4      |
| Standards                               | IEC 60947-7-1   | Wire connection cross section AWG, max. | AWG 12 |
| Wire connection cross section AWG, min. | AWG 22          |                                         |        |

## Rating data

|                                 |                   |                                              |        |
|---------------------------------|-------------------|----------------------------------------------|--------|
| Rated cross-section             | 4 mm <sup>2</sup> | Rated voltage                                | 400 V  |
| Rated current                   | 32 A              | Current at maximum wires                     | 32 A   |
| Standards                       | IEC 60947-7-1     | Volume resistance according to IEC 60947-7-x | 1 mΩ   |
| Rated impulse withstand voltage | 6 kV              | Power loss in accordance with IEC 60947-7-x  | 1.02 W |
| Pollution severity              | 3                 |                                              |        |

## UL rating data

|                                         |        |                                         |        |
|-----------------------------------------|--------|-----------------------------------------|--------|
| Certificate No. (UR)                    | E60693 | Conductor size Factory wiring max. (UR) | 12 AWG |
| Conductor size Factory wiring min. (UR) | 26 AWG | Conductor size Field wiring max. (UR)   | 12 AWG |
| Conductor size Field wiring min. (UR)   | 22 AWG | Current size B (UR)                     | 20 A   |
| Current size C (UR)                     | 20 A   | Current size D (UR)                     | 10 A   |
| Voltage size B (UR)                     | 250 V  | Voltage size C (UR)                     | 150 V  |
| Voltage size D (UR)                     | 300 V  |                                         |        |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001284    | ETIM 7.0    | EC001284    |
| ETIM 8.0    | EC001284    | ECLASS 9.0  | 27-14-11-06 |
| ECLASS 9.1  | 27-14-11-06 | ECLASS 10.0 | 27-14-11-06 |
| ECLASS 11.0 | 27-14-11-06 | ECLASS 12.0 | 27-14-11-06 |

## Approvals

Approvals



|                       |            |
|-----------------------|------------|
| ROHS                  | Conform    |
| UL File Number Search | UL Website |
| Certificate No. (UR)  | E60693     |

## Downloads

|                                             |                                                                                                                                            |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">EAC certificate</a><br><a href="#">Declaration of Conformity</a><br><a href="#">CE Declaration of Conformity all terminals</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>                                                                                                            |
| Engineering Data                            | <a href="#">EPLAN, WSCAD</a>                                                                                                               |
| User Documentation                          | <a href="#">StorageConditionsTerminalBlocks</a>                                                                                            |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                                                                                                   |
| Brochures                                   |                                                                                                                                            |