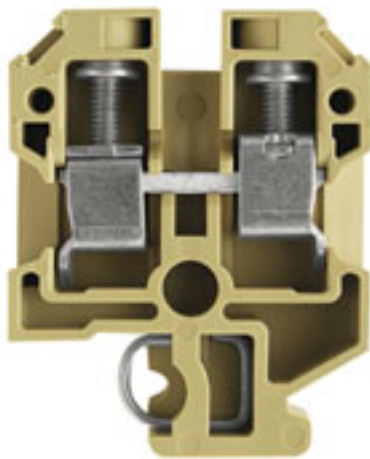


**SAK 10****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

**General ordering data**

|            |                                                                                                      |
|------------|------------------------------------------------------------------------------------------------------|
| Version    | SAK Series, Feed-through terminal, Rated cross-section: 10 mm <sup>2</sup> , Screw connection, beige |
| Order No.  | <a href="#">0110060000</a>                                                                           |
| Type       | SAK 10                                                                                               |
| GTIN (EAN) | 4008190027056                                                                                        |
| Qty.       | 100 pc(s).                                                                                           |

## SAK 10

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Depth      | 49 mm   | Depth (inches)  | 1.929 inch |
| Height     | 40 mm   | Height (inches) | 1.575 inch |
| Width      | 10 mm   | Width (inches)  | 0.394 inch |
| Net weight | 18.95 g |                 |            |

## Temperatures

|                                  |                |                                  |                                                                                                   |
|----------------------------------|----------------|----------------------------------|---------------------------------------------------------------------------------------------------|
| Storage temperature              |                | Operating temperature range      | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity |
|                                  | -25 °C...55 °C |                                  |                                                                                                   |
| Continuous operating temp., min. | -50 °C         | Continuous operating temp., max. | 100 °C                                                                                            |

## Material data

|                           |       |        |                |
|---------------------------|-------|--------|----------------|
| Material                  | PA 66 | Colour | beige / yellow |
| UL 94 flammability rating | V-2   |        |                |

## Rating data IECEx/ATEX

|                                |                                                                                                   |                                 |                    |
|--------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------|--------------------|
| Certificate No. (ATEX)         | TUEV18ATEX8207U                                                                                   | Certificate No. (IECEX)         | IECEXTUR18.0017U   |
| Max. voltage (ATEX)            | 550 V                                                                                             | Current (ATEX)                  | 57 A               |
| Wire cross section max. (ATEX) | 16 mm <sup>2</sup>                                                                                | Max. voltage (IECEX)            | 550 V              |
| Current (IECEX)                | 57 A                                                                                              | Wire cross section max. (IECEX) | 16 mm <sup>2</sup> |
| Operating temperature range    | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity | Marking EN 60079-7              |                    |
| Ex 2014/34/EU label            | II 2 G D                                                                                          |                                 | Ex eb II C Gb      |

## System specifications

|                                     |                                                                             |                               |     |
|-------------------------------------|-----------------------------------------------------------------------------|-------------------------------|-----|
| Version                             | Screw connection, for screwable cross-connection, One end without connector | End cover plate required      | Yes |
| Number of potentials                | 1                                                                           | Number of levels              | 1   |
| Number of clamping points per level | 2                                                                           | Number of potentials per tier | 1   |
| Levels cross-connected internally   | No                                                                          | PE connection                 | No  |
| Rail                                | TS 32                                                                       | N-function                    | No  |
| PE function                         | No                                                                          | PEN function                  | No  |

## Additional technical data

|                          |       |                             |         |
|--------------------------|-------|-----------------------------|---------|
| Explosion-tested version | No    | Number of similar terminals | 1       |
| Open sides               | right | Type of mounting            | Snap-on |

## CSA rating data

|                               |                |                               |       |
|-------------------------------|----------------|-------------------------------|-------|
| Certificate No. (CSA)         | 154685-1501714 | Current size C (CSA)          | 65 A  |
| Voltage size C (CSA)          | 600 V          | Wire cross section max. (CSA) | 6 AWG |
| Wire cross section min. (CSA) | 14 AWG         |                               |       |

## SAK 10

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max. 10 mm<sup>2</sup>

## Conductors for clamping (rated connection)

|                                                                                         |                     |                                                                                         |                      |
|-----------------------------------------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------|----------------------|
| Blade size                                                                              | 1.0 x 5.5 mm        | Clamping range, max.                                                                    | 16 mm <sup>2</sup>   |
| Clamping range, min.                                                                    | 1.5 mm <sup>2</sup> | Clamping screw                                                                          | M 4                  |
| Connection cross-section, stranded, max.                                                | 16 mm <sup>2</sup>  | Connection cross-section, stranded, min.                                                | 1.5 mm <sup>2</sup>  |
| Connection direction                                                                    | on side             | Gauge to IEC 60947-1                                                                    | B6                   |
| Number of connections                                                                   | 2                   | Stripping length                                                                        | 12 mm                |
| Tightening torque, max.                                                                 | 2.64 Nm             | Tightening torque, min.                                                                 | 2 Nm                 |
| Twin wire-end ferrules, max.                                                            | 6 mm <sup>2</sup>   | Twin wire-end ferrules, min.                                                            | 0.75 mm <sup>2</sup> |
| Type of connection                                                                      | Screw connection    | Wire connection cross section AWG, max.                                                 | AWG 6                |
| Wire connection cross section AWG, min.                                                 | AWG 14              | Wire connection cross section, finely stranded, max.                                    | 16 mm <sup>2</sup>   |
| Wire connection cross section, finely stranded, min.                                    | 1.5 mm <sup>2</sup> | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 10 mm <sup>2</sup>   |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 1.5 mm <sup>2</sup> | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 10 mm <sup>2</sup>   |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 1.5 mm <sup>2</sup> | Wire connection cross-section, solid core, max.                                         | 10 mm <sup>2</sup>   |
| Wire connection cross-section, solid core, min.                                         | 1.5 mm <sup>2</sup> |                                                                                         |                      |

## General

|                                         |       |                                         |               |
|-----------------------------------------|-------|-----------------------------------------|---------------|
| Rail                                    | TS 32 | Standards                               | IEC 60947-7-1 |
| Wire connection cross section AWG, max. | AWG 6 | Wire connection cross section AWG, min. | AWG 14        |

## Rating data

|                                 |                    |                                              |         |
|---------------------------------|--------------------|----------------------------------------------|---------|
| Rated cross-section             | 10 mm <sup>2</sup> | Rated voltage                                | 800 V   |
| Rated current                   | 57 A               | Current at maximum wires                     | 76 A    |
| Standards                       | IEC 60947-7-1      | Volume resistance according to IEC 60947-7-x | 0.56 mΩ |
| Rated impulse withstand voltage | 8 kV               | Power loss in accordance with IEC 60947-7-x  | 1.82 W  |
| Pollution severity              | 3                  |                                              |         |

## UL rating data

|                                         |        |                                         |       |
|-----------------------------------------|--------|-----------------------------------------|-------|
| Certificate No. (UR)                    | E60693 | Conductor size Factory wiring max. (UR) | 6 AWG |
| Conductor size Factory wiring min. (UR) | 14 AWG | Conductor size Field wiring max. (UR)   | 6 AWG |
| Conductor size Field wiring min. (UR)   | 14 AWG | Current size C (UR)                     | 60 A  |
| Voltage size C (UR)                     | 600 V  |                                         |       |

## SAK 10

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ECLASS 9.0  | 27-14-11-20 |
| ECLASS 9.1  | 27-14-11-20 | ECLASS 10.0 | 27-14-11-20 |
| ECLASS 11.0 | 27-14-11-20 | ECLASS 12.0 | 27-14-11-20 |

## Approvals

Approvals



|                           |            |
|---------------------------|------------|
| ROHS                      | Conform    |
| UL File Number Search     | UL Website |
| Certificate No. (UR)      | E60693     |
| Certificate No. (cURusEX) | E184763    |

## Downloads

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">Attestation Of Conformity</a><br><a href="#">cfat sak !=</a><br><a href="#">CB Certificate</a><br><a href="#">CB Test Certificate</a><br><a href="#">EAC certificate</a><br><a href="#">DNVGL certificate</a><br><a href="#">Lloyds Register Certificate</a><br><a href="#">MARITREG Certificate</a><br><a href="#">EAC EX Certificate</a><br><a href="#">IECEX Certificate</a><br><a href="#">ATEX Certificate</a><br><a href="#">Declaration of Conformity</a><br><a href="#">CE Declaration of Conformity all terminals</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Engineering Data                            | <a href="#">EPLAN, WSCAD</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Product Change Notification                 | <a href="#">20210308 Technical Change SAK PA 32</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| User Documentation                          | <a href="#">StorageConditionsTerminalBlocks</a><br><a href="#">NTI SAK 10/32</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |