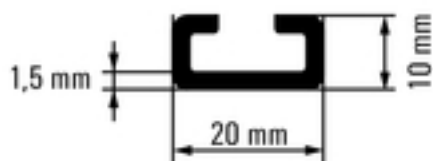


**TS 20/CX10 2M/ST/ZN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

**General ordering data**

|            |                                              |
|------------|----------------------------------------------|
| Version    | Rail, TS 20, without slot, Steel, galvanized |
| Order No.  | <a href="#">0316400000</a>                   |
| Type       | TS 20/CX10 2M/ST/ZN                          |
| GTIN (EAN) | 4032248017331                                |
| Qty.       | 2 m                                          |

## TS 20/CX10 2M/ST/ZN

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Depth      | 10 mm    | Depth (inches)  | 0.394 inch |
| Height     | 10 mm    | Height (inches) | 0.394 inch |
| Width      | 2,000 mm | Width (inches)  | 78.74 inch |
| Net weight | 460 g    |                 |            |

## Mounting rail

|                             |                 |          |
|-----------------------------|-----------------|----------|
| Installation advice         | Direct mounting |          |
| Length of the terminal rail | max.            | 2,000 mm |
|                             | min.            | 0 mm     |
|                             | nominal         | 2,000 mm |
| Material                    | Steel           |          |
| Pre-punched mounting rail   | No              |          |
| Slit gap                    |                 |          |
| Slit length                 |                 |          |
| Slit width                  |                 |          |
| Standards                   | DIN EN 60715    |          |
| Surface finish              | galvanized      |          |
| Thickness                   | 1.5 mm          |          |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001285    | ETIM 7.0    | EC001285    |
| ETIM 8.0    | EC001285    | ECLASS 9.0  | 27-40-06-02 |
| ECLASS 9.1  | 27-40-06-02 | ECLASS 10.0 | 27-40-06-02 |
| ECLASS 11.0 | 27-40-06-02 | ECLASS 12.0 | 27-40-06-02 |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                    |                                                 |
|--------------------|-------------------------------------------------|
| Engineering Data   | <a href="#">CAD data – STEP</a>                 |
| Engineering Data   | <a href="#">EPLAN, WSCAD</a>                    |
| User Documentation | <a href="#">StorageConditionsTerminalBlocks</a> |
| Catalogues         | <a href="#">Catalogues in PDF-format</a>        |