


**HBT 1,5 - 3,0 RT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

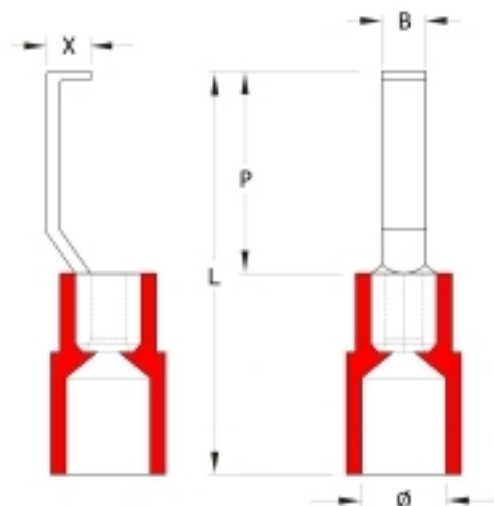

The use of insulated connectors guarantees users a permanent and consistent quality for their electrical connections.

In addition, they bring advantages during installation.

**General ordering data**

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
| Version    | cable lug, terminal end, Insulated cable connector, 0.5 mm <sup>2</sup> - 1.5 mm <sup>2</sup> , red |
| Order No.  | <a href="#">1312440000</a>                                                                          |
| Type       | HBT 1,5 - 3,0 RT                                                                                    |
| GTIN (EAN) | 4050118115055                                                                                       |
| Qty.       | 100 pc(s).                                                                                          |

## HBT 1,5 - 3,0 RT

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |        |
|------------|--------|
| Net weight | 0.79 g |
|------------|--------|

## Technical data

|                        |                                  |
|------------------------|----------------------------------|
| Description of article | isolated hook-blade cable<br>lug |
|------------------------|----------------------------------|

## Connectors

|                               |                     |                               |                     |
|-------------------------------|---------------------|-------------------------------|---------------------|
| Conductor cross-section, max. | 1.5 mm <sup>2</sup> | Conductor cross-section, min. | 0.5 mm <sup>2</sup> |
| Identification colour         | red                 | Insulation                    | Available           |
| Material/plastic              | PC                  |                               |                     |

## Dimensions

|             |         |                          |         |
|-------------|---------|--------------------------|---------|
| Hook nose X | 2.1 mm  | Insulation cross-section | 4       |
| Length L    | 28.4 mm | Pin length P             | 17.4 mm |
| Pin width B | 3 mm    |                          |         |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001059    | ETIM 7.0    | EC001059    |
| ETIM 8.0    | EC001059    | ECLASS 9.0  | 27-40-02-92 |
| ECLASS 9.1  | 27-40-02-12 | ECLASS 10.0 | 27-40-02-92 |
| ECLASS 11.0 | 27-40-02-92 | ECLASS 12.0 | 27-40-02-92 |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                  |                                          |
|------------------|------------------------------------------|
| Engineering Data | <a href="#">EPLAN</a>                    |
| Catalogues       | <a href="#">Catalogues in PDF-format</a> |
| Brochures        |                                          |