

96271607 EFACT R0 3L50 ACC 9D 840 RS SF

LED 6W LED_EFCT_346_3K	IP67	IK09							
------------------------	------	------	--	--	--	--	--	--	--


E/Fact

A small round ground recessed luminaire. 3 LED(s) driven at 500mA by integral driver, 9° beam angle for walkover guidance applications. Tilting angle adjustment of $\pm 22^\circ$. Body: die-cast aluminium with powdered paint finish. Frame: stainless steel, 2mm thick. Front glass: semi-frosted toughened sodic glass, 8mm thick, surface temperature complies with EN60598-2-13. Recessing box: polypropylene. Rated IP67, class I electrical. Maximum static load 1000kg. Complete with 4000K LED


Dimensions: $\varnothing 120 \times 126$ mm
 Luminaire input power: 6 W
 Luminaire luminous flux: 346 lm
 Luminaire efficacy: 58 lm/W
 Weight: 1.33 kg



TLG_EFCT_F_R03LEDRSSF.jpg

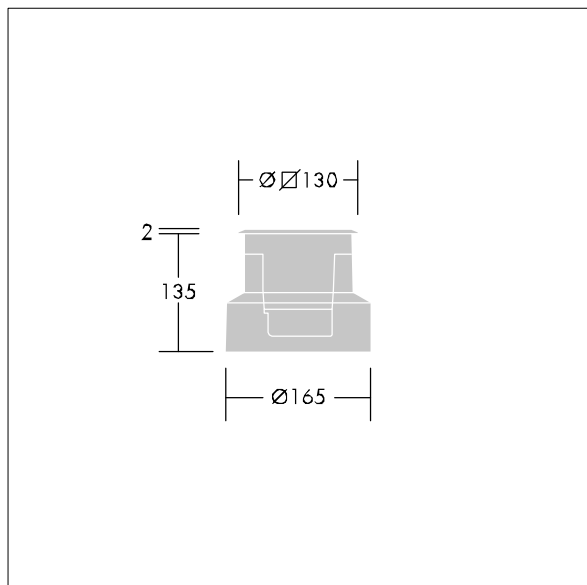

TLG_EFCT_M_2015LD0RS.wmf

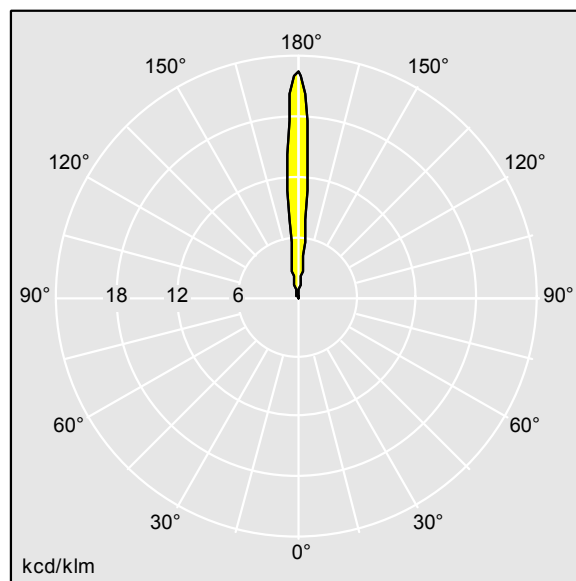

TLLA_96271607.idt

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 346 lm
 Luminaire efficacy*: 58 lm/W
 Colour Rendering Index min.: 80
 LOR: 1,00 ULOR: 1,00 DLOR: 0,00

Correlated colour temperature: 3000 Kelvin
 Rated median useful life*:
 50000h at 25°C
 Ballast: 1x EL2
 Luminaire input power*: 6 W
 Dimming: FO

This product contains a light source of energy efficiency class E.