

96271666 EFACT C2 9L90 ACC 8D 840 AL SF

LED 27W LED_EFCT_1660_4K	IP67	IK09	⏚	CE	⚠	EAC	🔧	☀	🔍
--------------------------	------	------	---	----	---	-----	---	---	---

E/Fact

A large square ground recessed luminaire. 9 LED(s) driven at 900mA by integral driver, 8° beam angle for walkover guidance applications. Tilting angle adjustment of $\pm 15^\circ$. Body: die-cast aluminium with powdered paint finish. Frame: painted aluminium, 2mm thick. Front glass: semi-frosted toughened sodic glass, 12mm thick, surface temperature complies with EN60598-2-13. Recessing box: polypropylene. Rated IP67, class I electrical. Maximum static load 1000kg. Complete with 4000K LED

Dimensions: 262 x 262 x 200 mm

Luminaire input power: 27.3 W


Luminaire luminous flux: 1660 lm

Luminaire efficacy: 61 lm/W


Weight: 7.21 kg



TLG_EFCT_F_C29LEDALSF.jpg

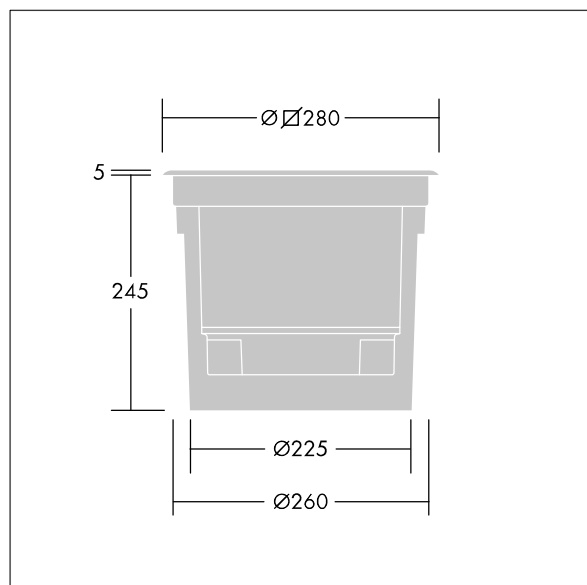

TLG_EFCT_M_2015LD2AL.wmf

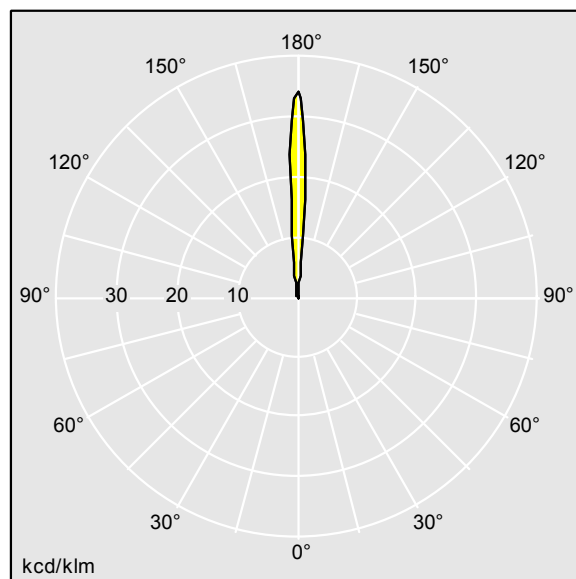

TLLA_96271666.idt

Lamp position: STD - standard

Light Source: LED

Luminaire luminous flux*: 1660 lm

Luminaire efficacy*: 61 lm/W

Colour Rendering Index min.: 80

LOR: 1,00 ULOR: 1,00 DLOR: 0,00

Correlated colour temperature: 4000 Kelvin

Rated median useful life*:

50000h at 25°C

Ballast: 1x EL2

Luminaire input power*: 27.3 W

Dimming: FO

This product contains a light source of energy efficiency class E.