

96271694 EFACT R2 9L90 ACC 8D 832 AL SF

LED 27W LED_EFCT_1566_3K	IP67	IK09	⏚	CE	⚠	EAC	⚡	☀	ⓧ	Ⓜ
--------------------------	------	------	---	----	---	-----	---	---	---	---


E/Fact

A large round ground recessed luminaire. 9 LED(s) driven at 900mA by integral driver, 8° beam angle for walkover guidance applications. Tilting angle adjustment of ±15°. Body: die-cast aluminium with powdered paint finish. Frame: painted aluminium, 2mm thick. Front glass: semi-frosted toughened sodic glass, 12mm thick, surface temperature complies with EN60598-2-13. Recessing box: polypropylene. Rated IP67, class I electrical. Maximum static load 1000kg. Complete with 3200K LED


Dimensions: Ø260 x 200 mm
 Luminaire input power: 27.3 W
 Luminaire luminous flux: 1566 lm
 Luminaire efficacy: 57 lm/W
 Weight: 6 kg



TLG_EFCT_F_R29LEDALSF.jpg

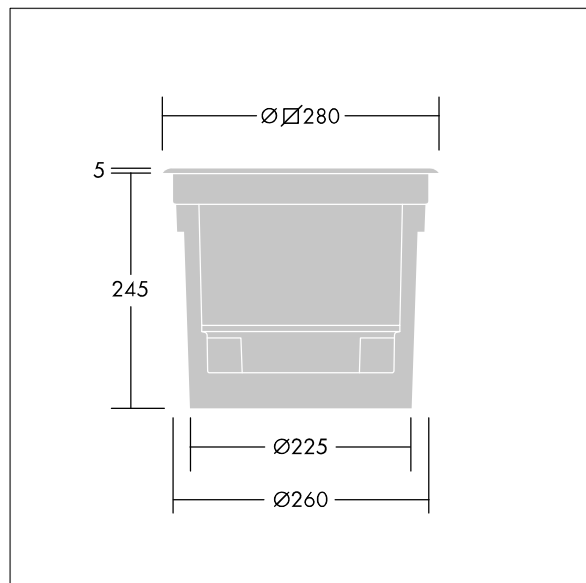

TLG_EFCT_M_2015LD2AL.wmf

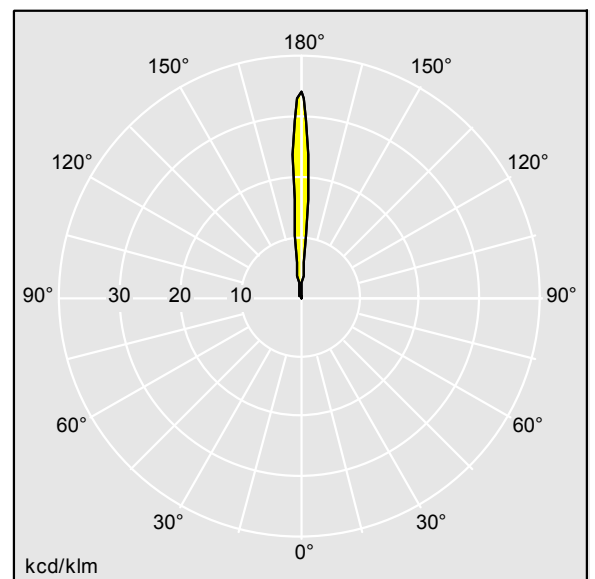

TLLA_96271694.idt

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 1566 lm
 Luminaire efficacy*: 57 lm/W
 Colour Rendering Index min.: 80
 LOR: 1,00 ULOR: 1,00 DLOR: 0,00

Correlated colour temperature: 3000 Kelvin
 Rated median useful life*:
 50000h at 25°C
 Ballast: 1x EL2
 Luminaire input power*: 27.3 W
 Dimming: FO

This product contains a light source of energy efficiency class E.