

96271733 EFACT R1 5L90 ACC 28D 832 RS SF

LED 16W LED_EFCT_887_3K	IP67	IK09	⏚	CE	⚡	EAC	⚙️	⚙️	⚙️
-------------------------	------	------	---	----	---	-----	----	----	----


E/Fact

A medium round ground recessed luminaire. 5 LED(s) driven at 900mA by integral driver, 28° beam angle for walkover guidance applications. Tilting angle adjustment of $\pm 15^\circ$. Body: die-cast aluminium with powdered paint finish. Frame: stainless steel, 2mm thick. Front glass: semi-frosted toughened sodic glass, 10mm thick, surface temperature complies with EN60598-2-13. Recessing box: polypropylene. Rated IP67, class I electrical. Maximum static load 1000kg. Complete with 3200K LED


Dimensions: $\varnothing 186 \times 202$ mm
 Luminaire input power: 16 W
 Luminaire luminous flux: 887 lm
 Luminaire efficacy: 55 lm/W
 Weight: 3.41 kg



TLG_EFCT_F_R15LEDRSSF.jpg

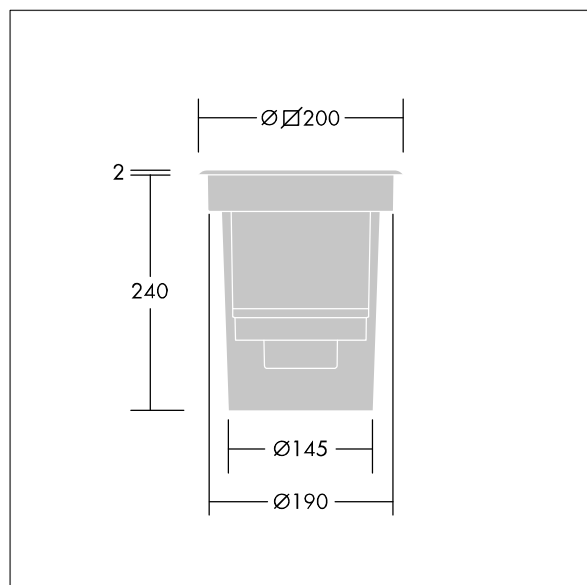

TLG_EFCT_M_2015LD1RS.wmf

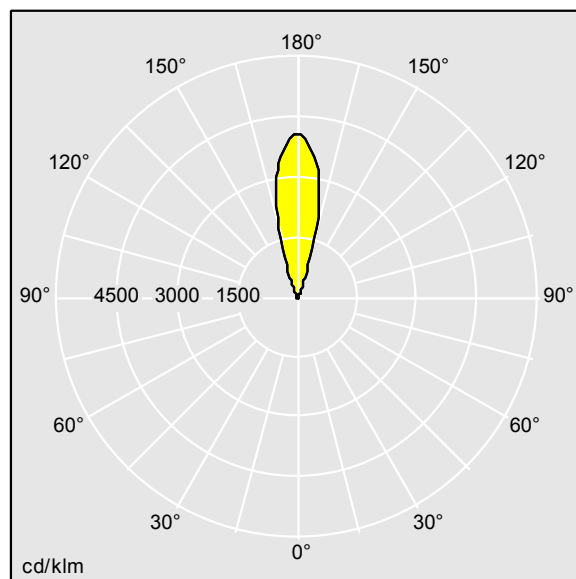

TLA_96271733.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 887 lm
 Luminaire efficacy*: 55 lm/W
 Colour Rendering Index min.: 80
 LOR: 1,00 ULOR: 1,00 DLOR: 0,00

Correlated colour temperature: 3000 Kelvin
 Rated median useful life*:
 50000h at 25°C
 Ballast: 1x EL2
 Luminaire input power*: 16 W
 Dimming: FO

This product contains a light source of energy efficiency class E.