

96271747 EFACT R2 9L90 ACC 28D 840 RS SF

LED 27W LED_EFCT_1630_4K	IP67	IK09	⏏	CE	⚡	EAC	⚡	⚡	⚡	⚡	⚡
--------------------------	------	------	---	----	---	-----	---	---	---	---	---


E/Fact

A large round ground recessed luminaire. 9 LED(s) driven at 900mA by integral driver, 28° beam angle for walkover guidance applications. Tilting angle adjustment of ±15°. Body: die-cast aluminium with powdered paint finish. Frame: stainless steel, 2mm thick. Front glass: semi-frosted toughened sodic glass, 12mm thick, surface temperature complies with EN60598-2-13. Recessing box: polypropylene. Rated IP67, class I electrical. Maximum static load 1000kg. Complete with 4000K LED


Dimensions: Ø260 x 200 mm
 Luminaire input power: 27.3 W
 Luminaire luminous flux: 1630 lm
 Luminaire efficacy: 60 lm/W
 Weight: 6.13 kg



TLG_EFCT_F_R29LEDRSSF.jpg

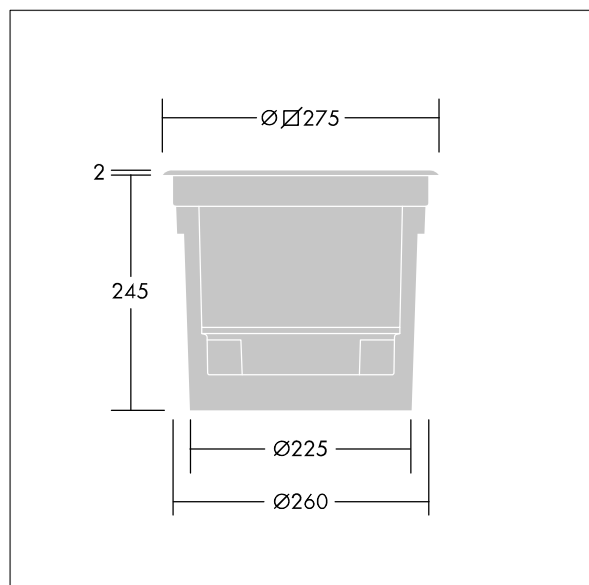

TLG_EFCT_M_2015LD2RS.wmf

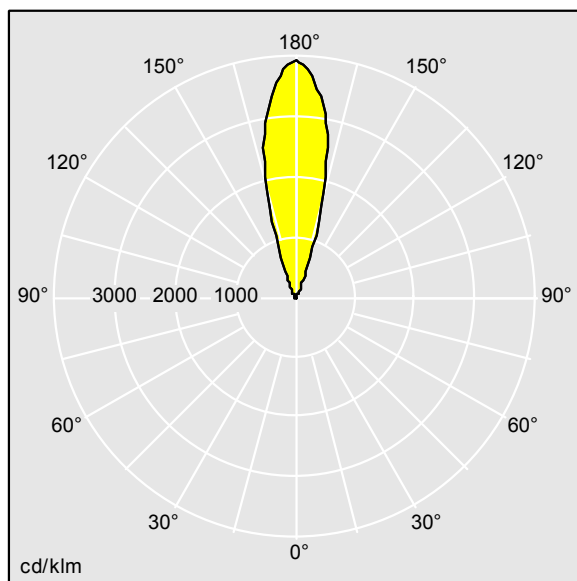

TLLA_96271747.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 1630 lm
 Luminaire efficacy*: 60 lm/W
 Colour Rendering Index min.: 80
 LOR: 1,00 ULOR: 1,00 DLOR: 0,00

Correlated colour temperature: 4000 Kelvin
 Rated median useful life*:
 50000h at 25°C
 Ballast: 1x EL2
 Luminaire input power*: 27.3 W
 Dimming: FO

This product contains a light source of energy efficiency class E.