

Safe-D Stag Clips



For 1x cable options
6-8mm & 8-10mm

For 2x cables options
6-8mm & 8-10mm



Drill pilot hole & select appropriate size of Stag Clip



Rest Stag Clip in the pilot hole ready to accept cable(s)



Insert cable(s) before squeezing the smooth head



Push home to secure the Stag Clip and cable(s)


Safe-D Stag Clips can be first-fixed with their lower barbs gripping in pilot-holes, ready for second-fix cabling works.

After cable(s) are inserted in the head section, installers simply push home the smooth head to give a tight fitment around either one or two cables.

The Stag Clip design eliminates any need to ever handle the sharp barbs, while inserting cables is incredibly simple, and no screws are required.

- >1200°C melting point
- Can be 1st fix rested in pilot hole, before 2nd fix inserting cable(s)
- No screw required, simply push smooth head in pilot hole, 5.5mm or 6mm x 30mm deep*
- Head sections overlap for secure cable fitment. 2x cable versions lock together when overlapped
- Ideal for FP & MICC cables, T&E and flexes

Code	Description
SAFEDSTAG6S	Holds 1x 6-8mm Cable. Galv
SAFEDSTAG6SR	Holds 1x 6-8mm Cable. Red
SAFEDSTAG6SB	Holds 1x 6-8mm Cable. Black
SAFEDSTAG6T	Holds 2x 6-8mm Cable. Galv
SAFEDSTAG6TR	Holds 2x 6-8mm Cable. Red
SAFEDSTAG6TB	Holds 2x 6-8mm Cable. Black
SAFEDSTAG8S	Holds 1x 8-10mm Cable. Galv
SAFEDSTAG8SR	Holds 1x 8-10mm Cable. Red
SAFEDSTAG8SB	Holds 1x 8-10mm Cable. Black
SAFEDSTAG8T	Holds 2x 8-10mm Cable. Galv
SAFEDSTAG8TR	Holds 2x 8-10mm Cable. Red
SAFEDSTAG8TB	Holds 2x 8-10mm Cable. Black

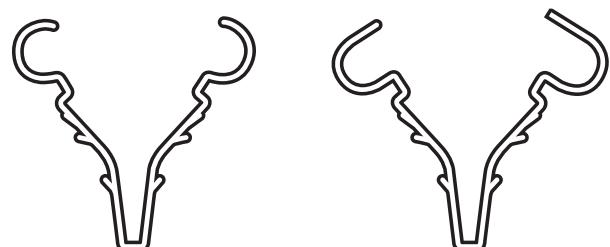

Stag Clip Single

Stag Clip Twin