

NVC UK - NVC Lighting Limited
NVC Park 201, Hollymoor Way, Rubery,
Birmingham, B31 5HE
T +44 (0)121 457 6340
E sales@nvcuk.com

NVC NORDICS - NVC Lighting AB
Albybergsringen 3b 137 69 Österhaninge
T +46(0)8 735 55 40
Sweden info@nvc-lighting.se
Finland info@nvcclighting.fi
Denmark info@nvcclighting.dk



DATASHEET

PHOENIX

Phoenix Reflector Steel LED 50/75W 6Ft 1-Side


6Ft Steel Reflector
Steel Construction With White Gloss Finish
Symmetric or Asymmetric Distribution



GENERAL INFORMATION	
Product Code	NPH/REFL/LED/50/ST
Product Range	Surface Mount
Product Category	Surface Mount
IP Rating	N/A
IK Rating	N/A
Warranty	N/A
DIMENSION/WEIGHT	
Dimensions Circular (DIA x H) (mm)	DIA=N/A, H=N/A
Dimensions Square/Rectangular (L x W x H) (mm)	L=1561, W=60, H=43
Cut-out Size (mm)	N/A
Product Weight (Kg)	0.5
CONSTRUCTION	
Body Material	Steel
Body Colour	N/A
Optical Material	N/A
Optical Finish	N/A
Termination	N/A
Driver - Intergal or Remote	N/A
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight inc. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (lm)	N/A
Power Consumption (W)	N/A
Efficacy	N/A
Operating Temp. (Min/Max)	N/A 25°C
LIGHT SOURCE	
Type	N/A
Correlated Colour Temp.	N/A
Correlated Rendering Index (CRI)	N/A
Lumen Depreciation	N/A
SDCM	N/A
ELECTRICAL INPUT	
VOLTAGE (V)	N/A
Operating Frequency	N/A
In Rush	N/A
Drivers per MCB*	N/A
Class	N/A
Power Factor	N/A
Cable Entry	N/A
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5055825967163

* GUIDE ONLY

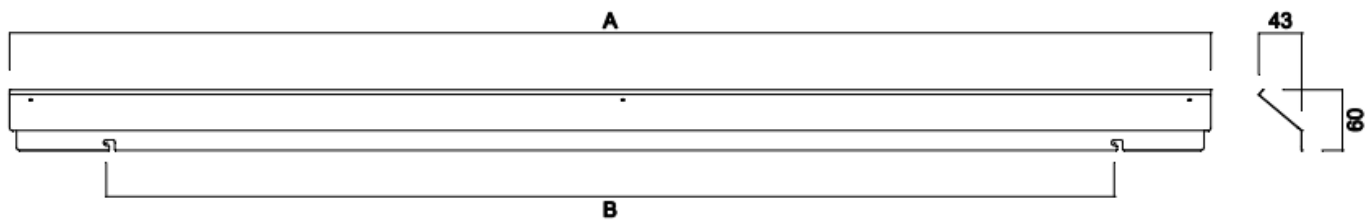

SIZE	A	B
30W	1189	997
40W	1489	1297
50W	1753	1561