

NVC UK - NVC Lighting Limited
NVC Park 201, Hollymoor Way, Rubery,
Birmingham, B31 5HE
T +44 (0)121 457 6340
E sales@nvcuk.com

NVC NORDICS - NVC Lighting AB
Albybergsringen 3b 137 69 Österhaninge
T +46(0)8 735 55 40
Sweden info@nvc-lighting.se
Finland info@nvc-lighting.fi
Denmark info@nvc-lighting.dk



DATASHEET

ARLINGTON PRO

Arlington Pro V2 ISO Legend Man Running Thru Door Left Right
Pack


ISO Legend
Changeable Acrylic Screen Printed Exit Legends
Green to Pantone 3405CVC Background



GENERAL INFORMATION	
Product Code	NAL/LE/LR/V2
Product Range	Emergency
Product Category	Emergency
IP Rating	N/A
IK Rating	N/A
Warranty	N/A
DIMENSION/WEIGHT	
Dimensions Circular (DIA x H) (mm)	DIA=N/A, H=N/A
Dimensions Square/Rectangular (L x W x H) (mm)	L=318, W=0.25, H=165
Cut-out Size (mm)	N/A
Product Weight (Kg)	0.05
CONSTRUCTION	
Body Material	Acrylic
Body Colour	Clear
Optical Material	N/A
Optical Finish	N/A
Termination	N/A
Driver - Integal or Remote	N/A
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight inc. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (lm)	N/A
Power Consumption (W)	N/A
Efficacy	N/A
Operating Temp. (Min/Max)	0°C to 25°C
LIGHT SOURCE	
Type	N/A
Correlated Colour Temp.	N/A
Correlated Rendering Index (CRI)	N/A
Lumen Depreciation	N/A
SDCM	N/A
ELECTRICAL INPUT	
VOLTAGE (V)	N/A
Operating Frequency	N/A
In Rush	N/A
Drivers per MCB*	N/A
Class	N/A
Power Factor	N/A
Cable Entry	N/A
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5055943063068

* GUIDE ONLY

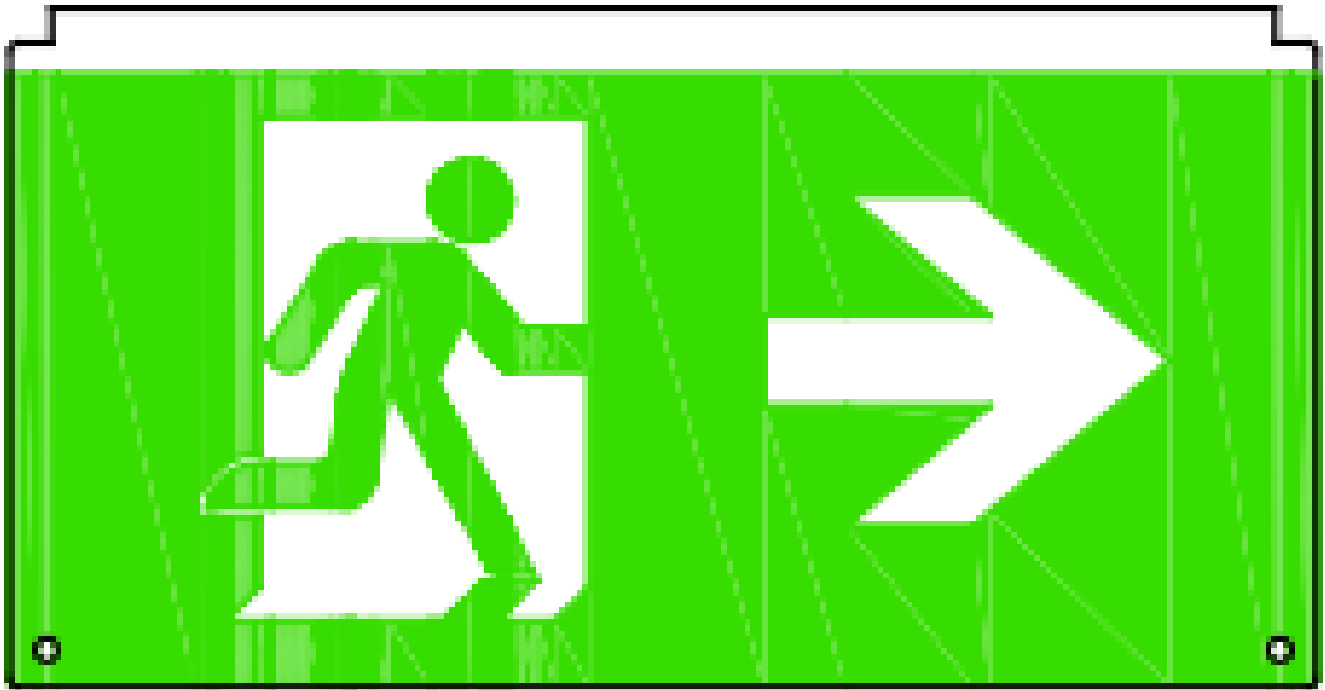

NAL/LE/LR/V2