NVC UK - NVC Lighting Limited
NVC Park 201, Hollymoor Way, Rubery,
Birmingham, B31 5HE
T +44 (0)121 457 6340
E sales@nvcuk.com

NVC NORDICS - NVC Lighting AB
Albybergsringen 3b 137 69 Österhaninge
T +46(0)8 735 55 40
Sweden info@nvc-lighting.se
Finland info@nvclighting.fi
Denmark info@nvclighting.dk

DATASHEET

AZTEC

Aztec V2 220W LED UFO High Bay IP65 1-10V 840

High Performing IP65 LED High Bay
High Quality Die Cast Aluminium Construction
Polycarbonate Front Suitable for Food Areas

IP65 | 5 YEAR WARRANTY | L70 50,000 | SDCM <5 | 1-10V | LITHIUM M3

GENERAL INFORMATION	
Product Code	NAC/V2/220/1-10V/840
Product Range	Industrial
Product Category	Industrial
IP Rating	65
IK Rating	N/A
Warranty	5 Years
DIMENSION/WEIGHT	
Dimensions Circular (DIA x H) (mm)	DIA=Ø350, H=175
Dimensions Square/Rectangular (L x W x H) (mm)	L=0, W=0, H=0
Cut-out Size (mm)	0
Product Weight (Kg)	4.91
CONSTRUCTION	
Body Material	Die Cast Aluminium
Body Colour	Black
Optical Material	N/A
Optical Finnish	N/A
Termination	1m H05 Flex
Driver - Intergal or Remote	Integral
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight inlc. Carton (Kg)	N/A

LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (lm)	32850
Power Consumption (W)	223
LED Lumens (lm/W)	185
Efficacy (l.lm/c.W)	147
Operating Temp. (Min/Max)	-30°C to 45°C
LIGHT SOURCE	
Type	LED
Correlated Colour Temp.	4000
Correlated Rendering Index (CRI)	>80
Lumen Depreciation	L70 50000
SDCM	<3
ELECTRICAL INPUT	
VOLTAGE (V)	220-240V AC
Operating Frequency	50
In Rush	<60A @ 700us
Drivers per MCB*	B10=10 B16=16
Class	Class 1
Power Factor	>0.95
Cable Entry	Prewired
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	N/A
OTHER	1-10V
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5055943084483
E NUMBER	7215546
S NUMBER	4344029

* GUIDE ONLY

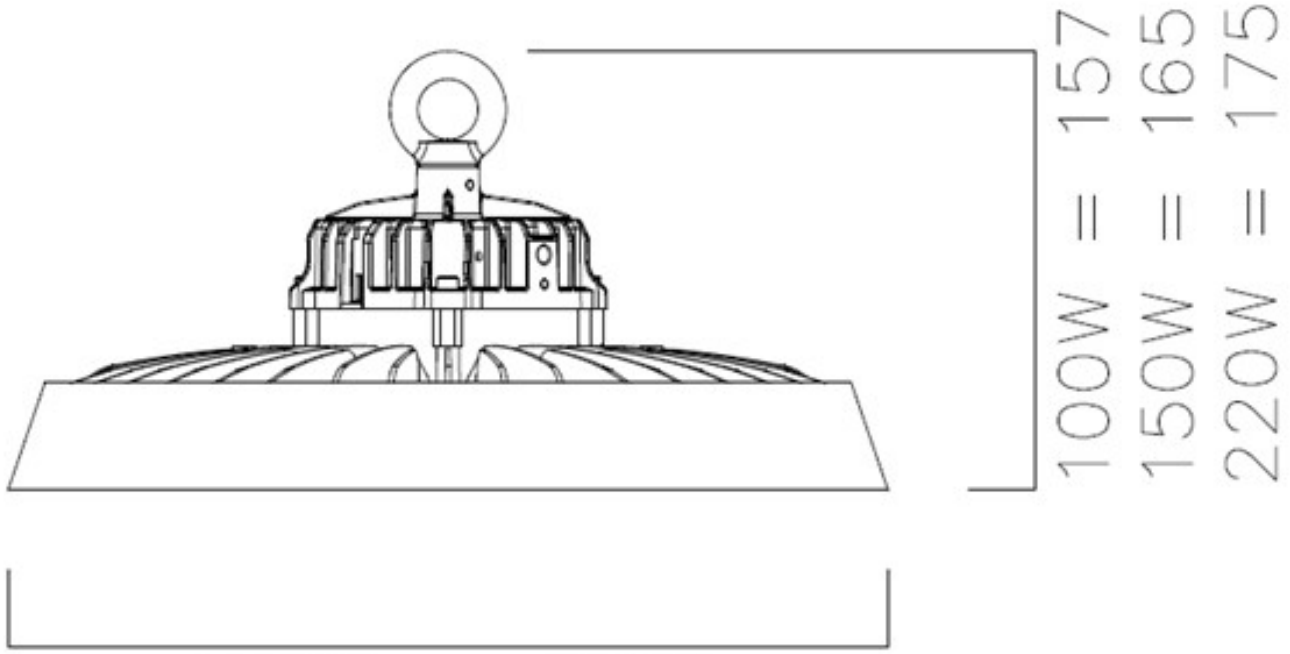

100W = ø296
150W = ø322
220W = ø350