

NVC UK - NVC Lighting Limited
NVC Park 201, Hollymoor Way, Rubery,
Birmingham, B31 5HE
T +44 (0)121 457 6340
E sales@nvcuk.com

NVC NORDICS - NVC Lighting AB
Albybergsringen 3b 137 69 Österhaninge
T +46(0)8 735 55 40
Sweden info@nvc-lighting.se
Finland info@nvc-lighting.fi
Denmark info@nvc-lighting.dk



DATASHEET

BELFRY

Belfry Mounting Collar To Suit 76-60MM Diameter



Mounting Collar Option
Die Cast Aluminium Construction
UKCA CE Approved



GENERAL INFORMATION	
Product Code	NBF/COLLAR/76-60MM
Product Range	Street Lighting
Product Category	Street Lighting
IP Rating	N/A
IK Rating	N/A
Warranty	N/A
DIMENSION/WEIGHT	
Dimensions Circular (DIA x H) (mm)	DIA=Ø89, H=0
Dimensions Square/Rectangular (L x W x H) (mm)	L=203, W=0, H=0
Cut-out Size (mm)	0
Product Weight (Kg)	0
CONSTRUCTION	
Body Material	Die Cast Aluminium
Body Colour	Grey
Optical Material	N/A
Optical Finish	N/A
Termination	N/A
Driver - Integal or Remote	Integral
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight inc. Carton (Kg)	0

LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (lm)	N/A
Power Consumption (W)	N/A
LED Lumens (lm/W)	N/A
Efficacy (l.m/c.W)	N/A
Operating Temp. (Min/Max)	-20°C to 25°C
LIGHT SOURCE	
Type	N/A
Correlated Colour Temp.	N/A
Correlated Rendering Index (CRI)	N/A
Lumen Depreciation	N/A
SDCM	N/A
ELECTRICAL INPUT	
VOLTAGE (V)	N/A
Operating Frequency	N/A
In Rush	N/A
Drivers per MCB*	N/A
Class	N/A
Power Factor	N/A
Cable Entry	N/A
ELECTRICAL OUTPUT	
Forward Current (mA)	-
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5055943038127

* GUIDE ONLY

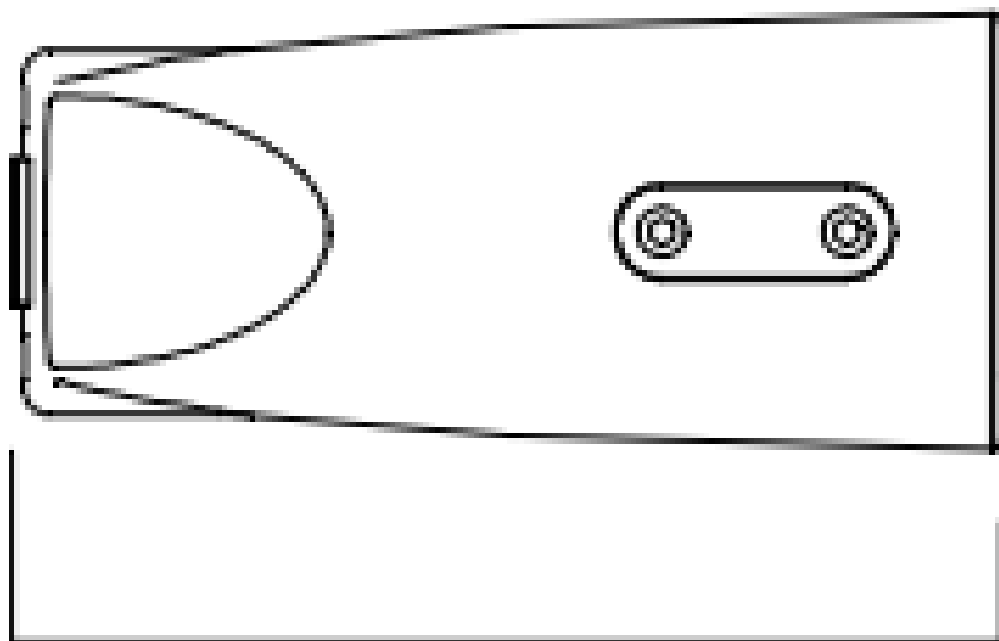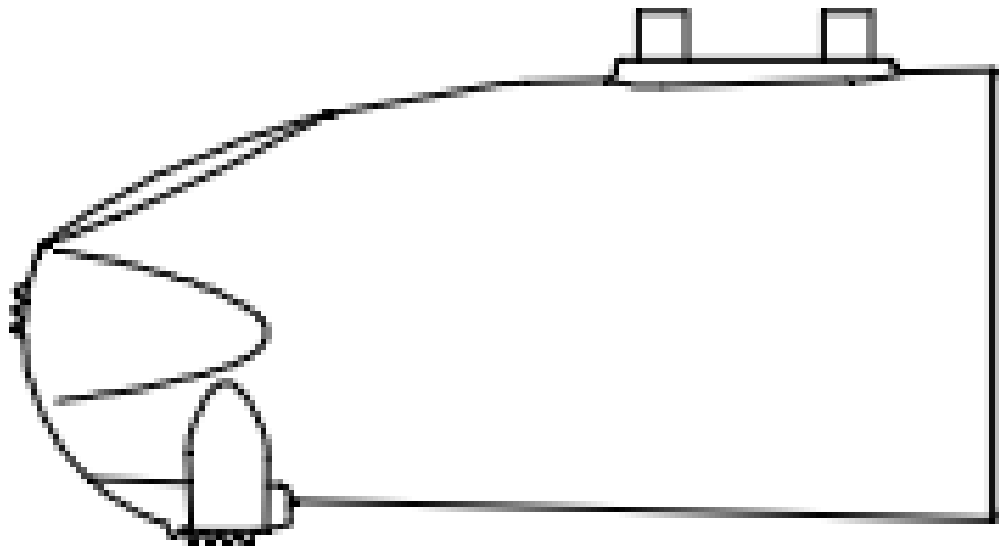

203



680