
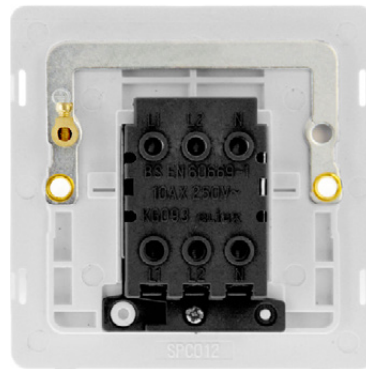


Product Code: SIN020BK

Description: 10A 3 Pole Fan Isolation Plate Switch Insert

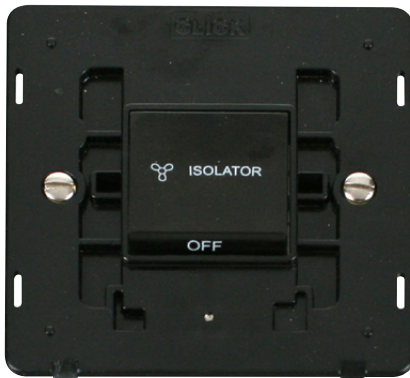

General Information

Insert Dimensions (mm)	82.5 (W) x 82.5 (H) x 2.5 (D)
Plate Fixing Centres - Horizontal (mm)	60.3
Style	Screwless Insert
Insert Colour	Black
Compatible Cover Plate	SCP402#
Materials	Insert: Polycarbonate Terminals: Brass Contacts: Silver "on-lay" Copper / Brass Earth Strap: Mild Steel
Anti Microbial Certified	No
Rated Voltage (V~) (Ue)	250
Inductive Load Rating (AX)	10
Load Rating Comments	Suitable for Inductive Loads
Termination Type	Screw
Terminal Size (mm)	Ø3.5
Terminal Capacity - Solid (mm²)	4 x 1.5 or 2 x 2.5
Triple Pole Switch	Yes
Product Marking	Isolator, On, Off
Minimum Back Box Depth (mm)	25
Ingress Protection	IP20
Operational Temperature (°C)	-5 to +40
Warranty (Years)	10

Rear Housing: Nylon
Terminal Screws: Steel & Yellow Passivated
Internal Busbars: Formed Pressed Brass

Frequency (Hz) 50

Terminal Torque Value (Nm) 0.5

Standards BS EN 60669-2-4
BS EN 60669-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Product Code: SCP402**

Description: 1 Gang MiniGrid® 2 Apertures Cover Plate

General Information

Dimensions (mm)	86 (W) x 86 (H) x 4 (D)
Finishes Available	BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), MB (Metal Black), MW (Metal White), BK (Matt Black), PW (Polar White) & RD (Red)
Plate Materials	Decorative & Metal Black or White: Stainless Steel, Black, Polar White & Red: Polycarbonate



SCP402BS




SCP402CH



SCP402SS



SCP402MB



SCP402MW



SCP402BK



SCP402PW



SCP402RD

UK Design Registration: 3015621