
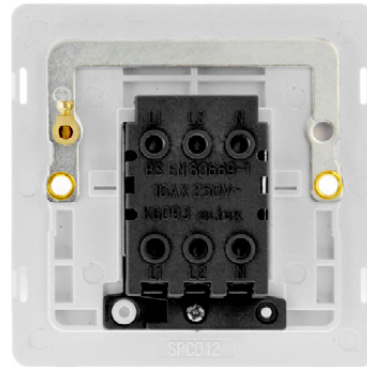


Product Code: SIN520BKBS

Description: 10A Ingot 3 Pole Fan Isolation Plate Switch Insert

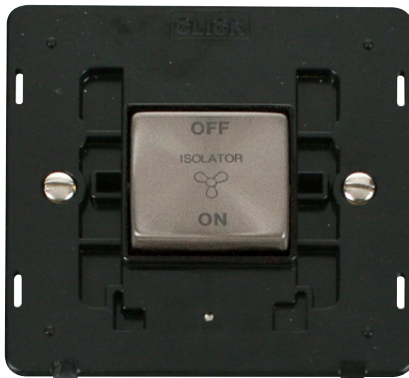

General Information

Insert Dimensions (mm) 82.5 (W) x 82.5 (H) x 2.5 (D)
Plate Fixing Centres - Horizontal (mm) 60.3

Style Screwless Insert
Finish Brushed Stainless

Insert Colour Black

Compatible Cover Plate SCP402#

Materials Insert: Polycarbonate
 Terminals: Brass
 Contacts: Silver "on-lay" Copper / Brass
 Earth Strap: Mild Steel

Switch Cover: Stainless Steel
 Terminal Screws: Steel & Yellow Passivated
 Internal Busbars: Formed Pressed Brass

Anti Microbial Certified No
Rated Voltage (V~) (Ue) 250
Inductive Load Rating (AX) 10
Load Rating Comments Suitable for Inductive Loads

Frequency (Hz) 50

Termination Type Screw
Terminal Size (mm) Ø3.5
Terminal Capacity - Solid (mm²) 4 x 1.5 or 2 x 2.5
Modular Rocker Switches No
Triple Pole Switch Yes
Product Marking Isolator, On, Off
Minimum Back Box Depth (mm) 35
Ingress Protection IP20
Operational Temperature (°C) -5 to +40
Warranty (Years) 10

Terminal Torque Value (Nm) 0.5

Standards BS EN 60669-2-4
 BS EN 60669-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Product Code: SCP402**

Description: 1 Gang MiniGrid® 2 Apertures Cover Plate

General Information

Dimensions (mm)	86 (W) x 86 (H) x 4 (D)
Finishes Available	BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), MB (Metal Black), MW (Metal White), BK (Matt Black), PW (Polar White) & RD (Red)
Plate Materials	Decorative & Metal Black or White: Stainless Steel, Black, Polar White & Red: Polycarbonate



SCP402BS




SCP402CH



SCP402SS



SCP402MB



SCP402MW



SCP402BK



SCP402PW



SCP402RD

UK Design Registration: 3015621