


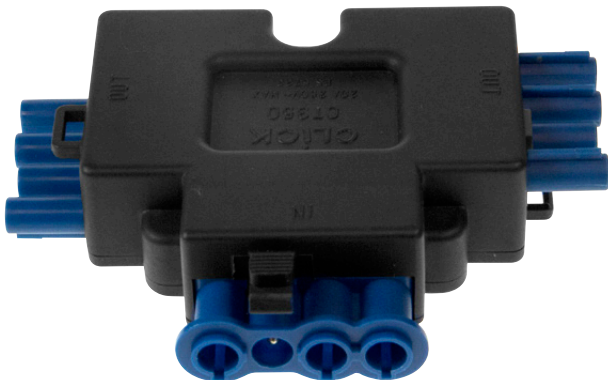

General Information

Dimensions (mm)	84.5 (W) x 70 (D) x 25 (H)		
Finish	Black		
Materials	Housing: Nylon Terminals: Silver Plated Brass Internal Busbars: Copper		
Rated Voltage (V~) (Ue)	250	Frequency (Hz)	50
Resistive Load Rating (A)	20		
Rated Impulse Voltage (kV)	4		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	10		

Standards BS 8488, BS EN 61535, BS 5733

Additional Information

Ensure that the mains supply is isolated before commencing installation. Always refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Pre-fabricating wiring systems manufactured to BS 8488 by other manufacturers may not be compatible or safely inter-connectable with this system. Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.

Compatible Connectors

Input Connector: Compatible With 3 and 4 Pole Connectors (Complete or Female)
Output Connectors: Compatible with 3 and 4 Pole Male Connectors

