


Product Code: PRW770

Description: 13A 2 Gang Switched Socket Outlet With Single 2.1A USB Outlet

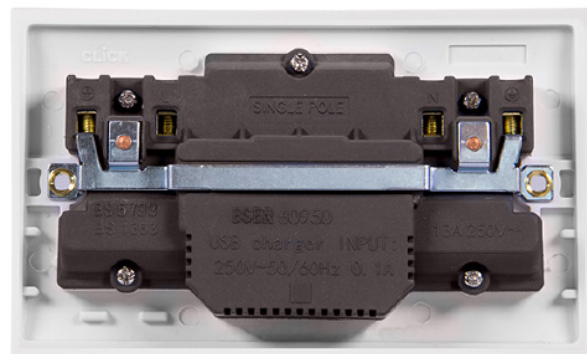

General Information

Plate Dimensions (mm)	146 (W) x 86 (H) x 11 (D)	
Plate Fixing Centres - Horizontal (mm)	120.6	
Style	Square Edge	
Finish	Polar White	
Materials	Front Plate & Rocker Switch: Urea Terminals: Brass Contacts: Silver "on-lay" Copper / Brass PCB: Mixed Components	Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel
Anti Microbial Certified	Yes	
Rated Voltage (V~) (Ue)	250	Frequency (Hz) 50
Resistive Load Rating (A)	13	
USB Output Type	USB Type "A"	
USB Number Of Outputs	1	USB Charging Total Load (A) 2.1
USB Charging Voltage (V DC)	5	USB Standby Current (mA) 2
Termination Type	Screw	
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm) 1.2
Terminal Capacity - Solid (mm²)	3 x 2.5 or 2 x 4	
Single Pole Switched	Yes	
Twin Earth Terminals	Yes	
Product Marking	USB 5V 2.1A	
Minimum Back Box Depth (mm)	25	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	Warranty - Electronics (Years) 1
Standards	BS 1363-2: 2016 +A1: 2018 BS EN IEC 62368-1 BS EN 62680-1-1	

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
The USB circuits within this socket outlet are designed to withstand insulation resistance tests at 500V. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.