


## Technical Specification

**Product Code:** DPSC20404

**Description:** 4 Gang GridPro® Frontplate

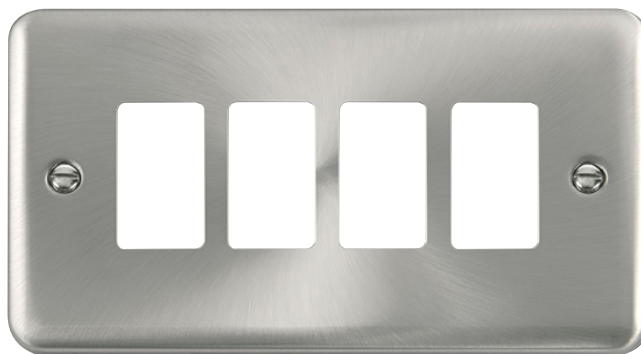

### General Information

|                                        |                                              |                                     |
|----------------------------------------|----------------------------------------------|-------------------------------------|
| Plate Dimensions (mm)                  | 146 (W) x 88 (H) x 8 (D)                     |                                     |
| Dimensions With Gasket (mm)            | 149 (W) x 91 (H) x 9 (D)                     |                                     |
| Plate Fixing Centres - Horizontal (mm) | 120.6                                        |                                     |
| Style                                  | Deco Plus                                    |                                     |
| Finish                                 | Satin Chrome                                 |                                     |
| Gasket Colour                          | Supplied With Both Black & White Gasket      |                                     |
| Materials                              | Front Plate: Stainless Steel<br>Insert: Urea | Gasket: Nylon<br>Fixing Lugs: Brass |
| Anti Microbial Certified               | No                                           |                                     |
| Yoke Required                          | No                                           |                                     |
| Minimum Back Box Depth (mm)            | 25                                           |                                     |
| Ingress Protection                     | IP20                                         |                                     |
| Operational Temperature (°C)           | -5 to +40                                    |                                     |
| Warranty (Years)                       | 10                                           |                                     |

**Standards** BS 5733

### Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.  
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
No yoke required.