


COMMERCIAL TOUCAN LED BATTEN




TOUCAN LED BATTEN, WHITE

- Suitable for use in flat and apartment blocks, public buildings, care homes, communal areas, reception areas
- Low profile aluminium housing with PBT end caps and polycarbonate diffuser
- Complete with stainless steel mounting brackets
- Pre-wired with 1m of flex
- Suitable for switching by external PIR, Microwave or Photocell

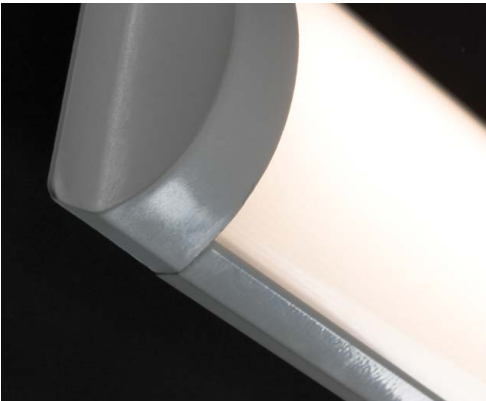


DIMENSIONS(mm)	Width	Length	Height
RTC184006-01	75	615	25
RTC364012-01	75	1,215	25
RTC454015-01	75	1,515	25

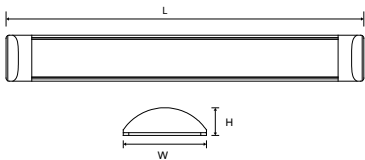



	0.6M	1.2M	1.5M
	18W	36W	45W
	RTC184006-01	RTC364012-01	RTC454015-01
Comparable to:	2 x 18W	2 x 36W	1 x 70W
Total Power (W):	18.7	34.3	43.4
Total Light Output (lm):	1,810	3,640	4,340
Efficacy (lm/cctW):	97	106	100
Lifetime (hrs):	30,000	30,000	30,000
Lux at 1m (lux):	600	1,200	1,400
Beam Angle (deg):	140	140	140
CCT (K):	4000	4000	4000
CRI:	80	80	80
IP:	20	20	20
Impact Rating (IK):	08	08	08
Power Factor (PF):	0.95	0.95	0.95
Box Qty:	1	1	1
Weight (kg):	0.42	0.8	1.1



SEAI Approved