


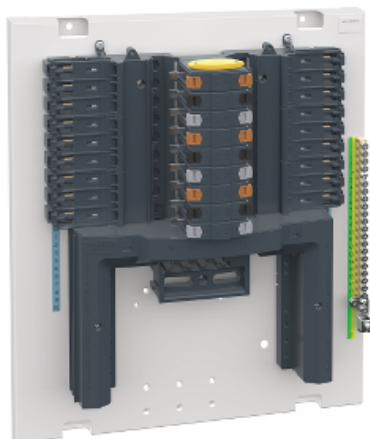

## Main

|                           |              |
|---------------------------|--------------|
| Range                     | Acti 9       |
| Product or component type | Pan assembly |
| Device application        | Distribution |

## Complementary

|                                      |                                                                                                                                                                                                              |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [In] rated current                   | 250 A                                                                                                                                                                                                        |
| Incomer device options               | Switch disconnecter - 2P<br>Terminal block - 2P<br>RCCB - 2P                                                                                                                                                 |
| Protection device options at outgoer | Miniature circuit breaker (MCB) 63 A max<br>Residual current circuit breaker with overcurrent protection (RCBO) 45 A max<br>Residual current circuit breaker with overcurrent protection (RCBO PoN) 45 A max |
| Number of ways                       | 6 ways - 3P + N + E                                                                                                                                                                                          |
| Short-circuit withstand              | 16 kA                                                                                                                                                                                                        |
| Length                               | 421 mm                                                                                                                                                                                                       |
| Busbar pitch                         | 18 mm                                                                                                                                                                                                        |

## Offer Sustainability

|                            |                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                 |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                     |
| Mercury free               | Yes                                                                                                                   |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a><br>Product out of China RoHS scope. Substance declaration for your information |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                         |
| Circularity Profile        | No need of specific recycling operations                                                                              |

Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|