




## Residential floodlights.

01604 495 151  
collingwoodlighting.com

 @collingwoodLED

 /collingwoodlighting

 collingwoodled



### GUARANTEE / WARRANTY

3 year extended warranty

### FEATURES & BENEFITS

Colour switchable  
IP44 (PIR version)  
115lm/W  
180° tilt  
360° rotation - complete adjustability  
Supplied with 1m cable  
25,000 hours L70 / B50  
Flicker free  
Wide 120° beam angle, reducing the number of fittings per area required  
PIR override

Beam angle: C0/C180 C90/C270

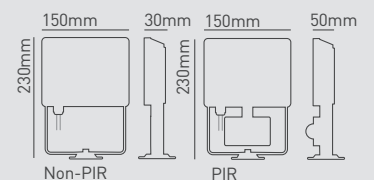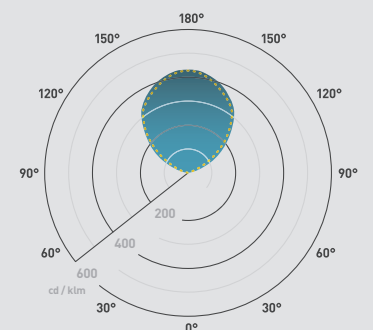

## FL02

20W colour switchable floodlight

### FEATURES

Wattage	20W
IP rating	IP65
IK rating	IK07
Colour flexibility	Colour switchable
Tilttable	180°
Rotatable	360°
UGR	UGR 14
Dimmable	No
Input	Mains AC
LED lifetime	25,000h
SDCM	5SDCM
Flicker free	Yes

### INSTALLATION INFORMATION

Inrush current	11A 0.474ms
Construction material	Black painted cast aluminium
Weight	580g
Maximum ambient temperature	40°C
Electric class (1, 2, 3)	1

### PHOTOMETRICS @ 25°C

Product code	Finish	Sensor	Colour	Beam angle	CRI	lm	lm/W	lx at 1m
FL02BXCS	Black	Non PIR sensor	6500K	120°	>80Ra	2200	110	943
			4000K	120°	>80Ra	2300	115	986
			3000K	120°	>80Ra	2000	100	858
FL02BPCS	Black	PIR sensor	6500K	120°	>80Ra	2200	110	943
			4000K	120°	>80Ra	2300	115	986
			3000K	120°	>80Ra	2000	100	858

### WIRING INFORMATION

Cable / flying lead	1m H05RN-F rubberised cable 3x1.0mm <sup>2</sup> Ø7mm
Type of wiring required	Parallel

### ACCESSORIES

N/A	No accessories required
-----	-------------------------