

JC71746EM

Skypack QR LED Batten 6ft Twin IP20 4000K 82W 9800lm EM



Features & Benefits

- Intelligent press release buttons for simple installation
- Ultra efficient, up to 120 lumens per circuit Watt
- Suitable for temperatures -10°C to 50°C
- Press fit terminals, loop in loop out
- Rear and end conduit entry points
- Suspended LED tray for easy installation

General Information

Product Range	Skypack™
Trade Name	Skypack™ QR
Light Source	LED
Light Source Features	Neutral White
Lighting Product Type	Linear Lighting
Lighting Product Type	Emergency Lighting
Product Shape	Rectangular

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross
Trading Estate, Bognor Regis, West Sussex, PO22 9TS
Company Registration Number: 03044848 | VAT Number: 918544112
T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

Mounting	Surface Mounted
Product Weight	3.13kg
Color Finish	White
Overall Dimensions	1828 x 70 x 76.5
Recommended Product Location	Domestic, Commercial and Industrial Applications
Method Of Fix	Surface with Conduit Entry
IP Rating	IP20
Environment	Indoor
Suitable For Zones	Outside zone 2
Origin Of Manufacture	Made In China
Guarantee	3 year warranty(2 year on batteries)
Driver Manufacturer	Ledtu
LED Manufacturer/Type	Runlite

Electrical

Voltage Rating	200-240
Secondary Running Current	2 x 1050mA
Primary Running Current	2 x 250mA
Operating Frequency (Hz)	50/60Hz
CC or CV	Constant Current
Luminaire Circuit Wattage	82
Sec - Voltage (V)	2 x 27-38VDC
Class	Class I: requires an Earth connection
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.9
Input Electrical Connections	Switched Live, Unswitched Live, Earth & Neutral
Dimmable	No

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross

Trading Estate, Bognor Regis, West Sussex, PO22 9TS

Company Registration Number: 03044848 | VAT Number: 918544112

T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk

Emergency Data

Load Voltage	6-60VDC
Nominal Battery Current	1.2 Amp
Recharge Time	24 hours
Battery Specification	3.6V 4000mAH Ni-Cd
Battery Life In Emergency Mode	3 hours
Charge Current	140mA
DDP Protection	Yes, 2.8V
LOR In Emergency Mode	8-12%
Inverter PFC	0.8

Performance Data

Energy Rating	A+
Actual Lumen Output	9800
Lumens Per Circuit Watt	120
LED Life (Hours)	36000
Color Rendering Index	80-89
CRI: Ra	80
Correlated Color Temperature	4000K
Light Distribution Detail	120-degree
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction

Primary Material	Steel
------------------	-------


Packaging

Quantity Per Outer Carton	8
---------------------------	---

Bar Code EAN Number	5052544093678
---------------------	---------------

Standards & Approvals

Listings	CE
Manufactured In Accordance To	BS EN 60598:2015, 2-1, 2-22
CE Marked	Yes
WEEE Symbol	Yes
Certificate Of Conformity	Yes: available on request.
Accredited Members	LIA, ISO9001:2015, ISO14001:2015

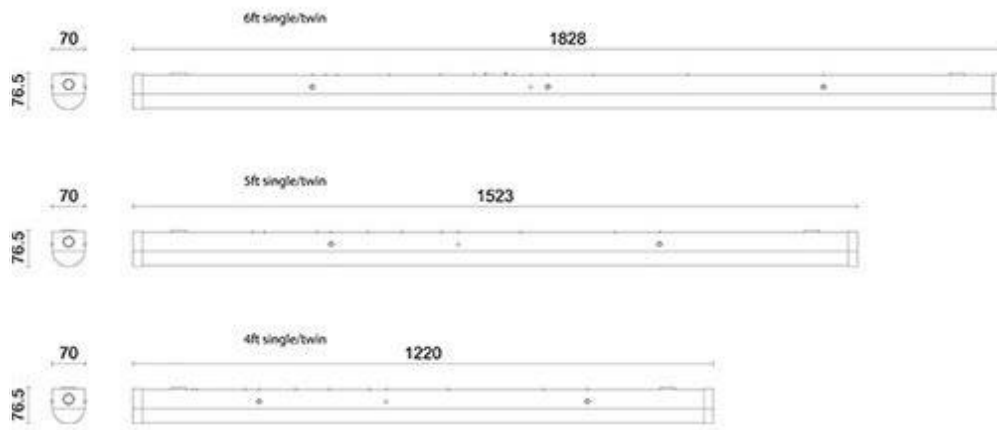

JCC Lighting

Innovation Centre, Beeding Close, Southern Cross

Trading Estate, Bognor Regis, West Sussex, PO22 9TS

Company Registration Number: 03044848 | VAT Number: 918544112

T: 01243 838999 | F: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk