

Skypack™ Quick Release 5ft Single



Intelligent press release design for a simple installation

- Conduit entry points at both ends
- Suitable for central BESA mounting
- DALI and 1-10V dimming available
- Microwave on/off and step dimmable sensing available
- Press-fit terminals with loop-in/loop-out



RATING

CLASS 1

CRI: RA


WARRANTY*

EM OPTIONS

SENSING

DIM OPTIONS

WHITE

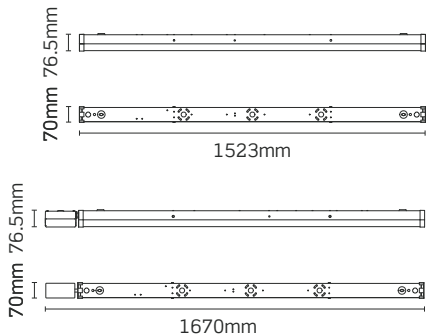

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC71743	Skypack QR 5ft single	4000K	No	37W	4440	120
JC71743DALI	Skypack QR 5ft single DALI	4000K	Yes	37W	4440	120
JC71743/1-10V	Skypack QR 5ft single 1-10V	4000K	Yes	37W	4440	120
JC71743MW	Skypack QR 5ft single microwave dim	4000K	-	37W	4440	120
JC71743MWO	Skypack QR 5ft single microwave on/off	4000K	No	37W	4440	120
JC71743EM	Skypack QR 5ft single emergency	4000K	No	39W	4440	113
JC71743EMDALI	Skypack QR 5ft single DALI emergency	4000K	Yes	39W	4440	113
JC71743EM/1-10V	Skypack QR 5ft single 1-10V emergency	4000K	Yes	39W	4440	113
JC71743EMMW	Skypack QR 5ft single microwave dim emergency	4000K	-	39W	4440	113
JC71743EMMWO	Skypack QR 5ft single microwave on/off emergency	4000K	No	39W	4440	113

Body: Steel. Diffuser: Polycarbonate.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.