

# Installation Sheet

# KSRSF301

Read these instructions before commencing installation & retain them for future reference.

IP65  0.3m 240V 12W IK08

## Important Information

It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

## Important User Advice

Always switch off mains supply before fitting or servicing.

## Installation Procedure (Fig.1)

Isolate mains supply before installation.

Unscrew and retain the four screws and remove the diffuser.

Loosen the 3 LED tray screws and rotate the tray to gain access to the wiring terminals.

Pass intended supply wires through grommet.

Ensure the fixing surface is flat and even.

Fix base to the wall, ceiling or besa box using adequate fixings with regard to type of surface.

Ensure incoming cables are protected.

Terminate wiring as per Fig.2.

Connect Battery and charge indicator.

Re-fit the LED tray and select colour required using the dip switches on the tray

Note: Never change the LED colour with the luminaire powered on as this can damage the luminaire.

Make sure the seal is in place in the diffuser and undamaged.


Replace the diffuser re-secure using the four screws.

If using an optional rim clip the rim over the fitting.

Turn on the mains supply and test luminaire.

The battery should be allowed to charge for a minimum period of 24 hours before testing for its rated duration.

Fig.2

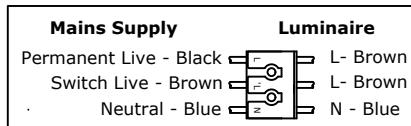


## Navara SF




## 12W Triple CCT Emergency Bulkhead

Finish: White/Opal - Optional rims available see [www.ksrlighting.com](http://www.ksrlighting.com)

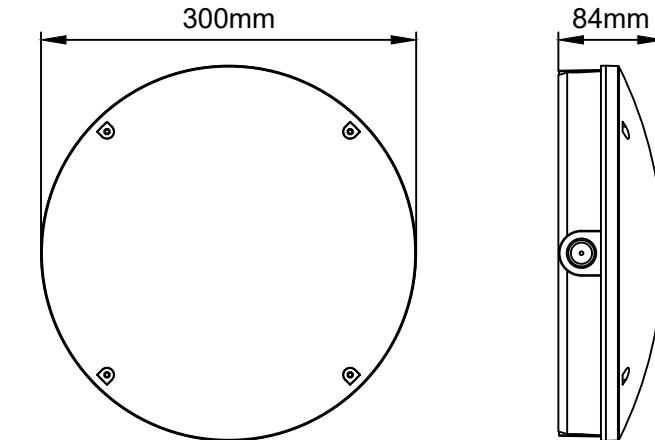


KSRSF301

Fig.1

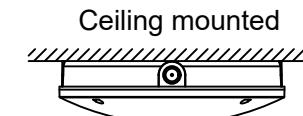

Wall mounted

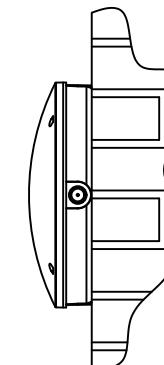

### Lamp Details

Lamp: LED  
Wattage: 12W  
Colour: 3000K, 4000K and 6000K CCT  
Lumen Output:  
3000K - 950 lumens  
4000K - 1398 lumens  
6000K - 1060 lumens  
CRI: Ra>82

KSR Lighting Aftersales: 023 92 674343  
E-mail: [aftersales@ksrlighting.com](mailto:aftersales@ksrlighting.com)

