



Read these instructions before commencing installation & retain them for future reference.

IP20

Important Information

It is recommended that the profile bar is installed and fitted by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control.



Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a sub-standard installation.

Installation


KSR recommend that you familiarize yourself with the connections and suitable locations for the profile bar. KSR does not recommend for areas of high foot traffic and areas where stiletto style footwear is worn. The profile bar can be cut to a desired length. See Fig.1 for supplied accessories make sure end caps are fixed correctly and at either end of the bar.

If cutting you can order additional end caps and fixings if required. Fix the profile bar into the recess using your preferred fixing method for the substrate. See Fig.2 Commence attaching LED strip to inside of profile bar (12mm maximum). Snap the diffuser into the profile bar. Fig.3 Shows the completed profile. Connect LED strip to a suitable supply and test as per the LED strip instructions.



Fig. 1

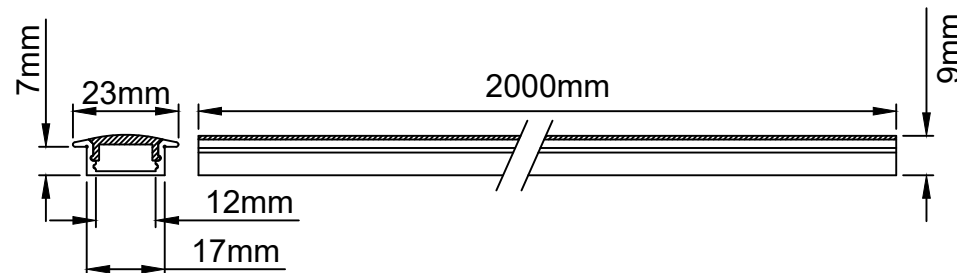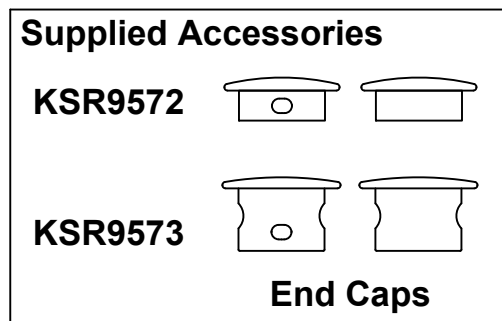

KSR9572

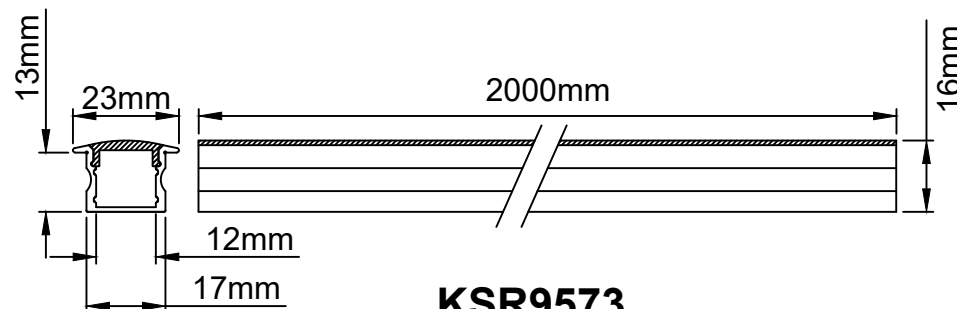

KSR9573

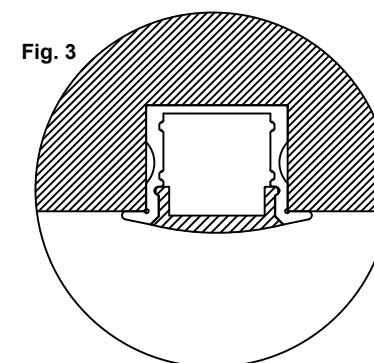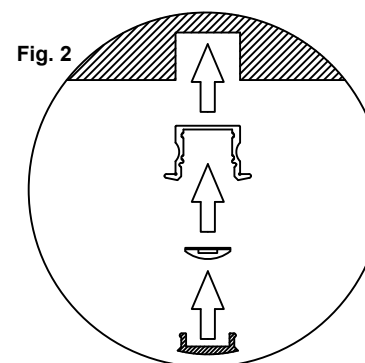

KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com