




MORE CHOICE -  
MORE FLEXIBILITY!

See  
Page 2  
For Installation  
Quick Guide



**Eterna**<sup>®</sup>  
Everyday Lighting For Professionals



| Code       | Colour | Version  | Wattage | Colour Temp.            | Lumens                        | Avg. Rated Life (Hrs) | IP Rating | MOM / OPQ |
|------------|--------|----------|---------|-------------------------|-------------------------------|-----------------------|-----------|-----------|
| CSLEDCR    | Chrome | Standard | 17W     | 3100K<br>4200K<br>6400K | 1250 lm<br>1350 lm<br>1300 lm | 35,000 hrs            | IP65      | 1 / 8     |
| CSLEDWH    | White  |          |         |                         |                               |                       |           |           |
| CSLEDCREM3 | Chrome | EM3      |         |                         |                               |                       |           |           |
| CSLEDWHEM3 | White  |          |         |                         |                               |                       |           |           |
| MSCSLEDCR  | Chrome | MW       |         |                         |                               |                       |           |           |
| MSCSLEDWH  | White  |          |         |                         |                               |                       |           |           |
| MSCSLCREM3 | Chrome | MW + EM3 |         |                         |                               |                       |           |           |
| MSCSLWHEM3 | White  |          |         |                         |                               |                       |           |           |
| SDCSLEDCR  | Chrome | SD       |         |                         |                               |                       |           |           |
| SDCSLEDWH  | White  |          |         |                         |                               |                       |           |           |
| SDCSLCREM3 | Chrome | SD + EM3 |         |                         |                               |                       |           |           |
| SDCSLWHEM3 | White  |          |         |                         |                               |                       |           |           |

LED COLOUR SELECTABLE FITTINGS

Versatile range of decorative bulkheads, offering practicality and style with multiple functional options - perfect for superior leisure, hotels & outdoor applications

- Polycarbonate construction • Full circular LED array
- IP65, ceiling or wall mounted
- Colour temperature selectable - options of 3100K, 4200K & 6400K easily set by a dip switch on the gear tray
- Plug in connector between the terminal block and the gear tray. Terminal block is located on the base, allowing for easy wiring and the gear tray to be removed during installation

EMERGENCY VERSIONS:

- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Battery - Li-Ion 3.2V 1500mAh • Battery 1 year warranty - Replacement battery code: EB11

MICROWAVE SENSOR VERSIONS:

- Adjustable microwave sensor: with options to adjust 2-50 lux or disable, detection range 10-100% and time 5 secs - 15 mins
- The microwave sensor is discreetly placed behind the diffuser: making it unobtrusive so there is no compromise to the appearance of the fitting or the room design

10% STEP DIM MICROWAVE SENSOR VERSIONS:

- Operation at 100% light level after last presence detection, reducing to 10% light output after installer selected time delay
- Delay time to 10% operation adjustable: 5 sec / 30 sec / 1 min / 5 min / 15 min / 30 min
- 30~150° detection angle
- 12~18m adjustable detection range: 100% / 75% / 50% / 25% / 10%
- Detection is possible through doors, glass panels and thin walls

| LED LAMP SPECIFICATIONS:                                                 |                               |
|--------------------------------------------------------------------------|-------------------------------|
| Luminaire lumens (with diffuser): Warm White, Cool White, Daylight White | 1250 lm<br>1350 lm<br>1300 lm |
| Lumens from chip (array): Warm White, Cool White, Daylight White         | 1700 lm<br>1850 lm<br>1750 lm |
| Useful lumens (array): Warm White, Cool White, Daylight White            | 1200 lm<br>1300 lm<br>1250 lm |
| Rated Wattage                                                            | 17W                           |
| Rated luminous flux                                                      | 1200/1300/1250 lm             |
| Nominal life time of the lamp                                            | 35,000 hrs                    |
| Colour temperature                                                       | 3100/4200/6400K               |
| Number of switching cycles before premature lamp failure                 | 15,000                        |
| Warm-up time up to 60% of the full light output                          | Instant full light            |
| Dimmable                                                                 | No                            |
| Nominal beam angle                                                       | 120°                          |
| Rated power                                                              | 17W                           |
| Rated lamp lifetime                                                      | 35,000 hrs                    |
| Lamp power factor                                                        | >0.88                         |
| Lumen maintenance factor at end of nominal life                          | >0.7                          |
| Starting time                                                            | <0.1s                         |
| Colour rendering                                                         | >80 Ra                        |
| Colour consistency                                                       | Within 6 step Macadam ellipse |
| Rated peak intensity                                                     | 520cd                         |
| Rated beam angle                                                         | 120°                          |
| Voltage / Frequency                                                      | 240V~50Hz                     |
| Not suitable for accent lighting                                         |                               |



5  
Year Warranty






## STEP 1

Remove diffuser



## STEP 2

Loosen screws and remove gear tray

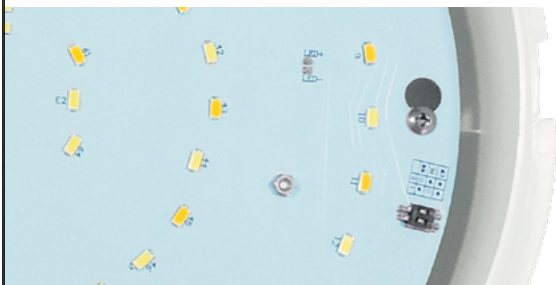

## KEYHOLE SLOTS

No need to remove screws



## STEP 3

Fix base to mounting surface




## STEP 4

Connect mains supply

## PUSH-FIT TERMINALS

For quick connection

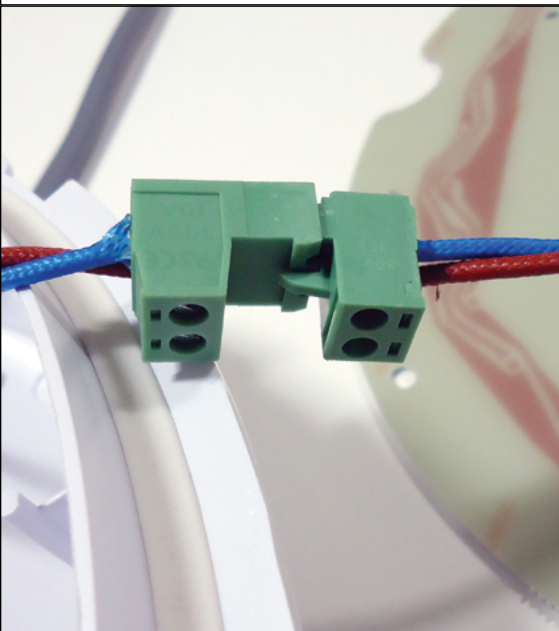

## STEP 5

Connect plug between gear tray & base



## STEP 6


Fix and secure gear tray in place



## STEP 7

Set colour temperature

| 1      | 2 |         | KTemp |
|--------|---|---------|-------|
| ●      | ○ | WW      | 3100K |
| ○      | ● | DL      | 6400K |
| ●      | ● | CW      | 4200K |
| ● = ON |   | ○ = OFF |       |

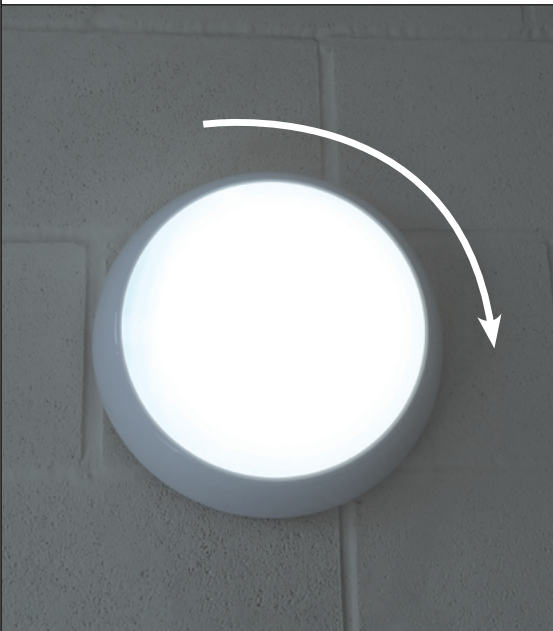

## STEP 8

Twist lock diffuser in place