



Data Sheet | Item Number: 773-173

PUSH WIRE® connector for junction boxes; for solid and stranded conductors; max. 6 mm²; 3-conductor; transparent housing; red cover; Surrounding air temperature: max 60°C; 6,00 mm²; multicoloured

<https://www.wago.com/773-173>

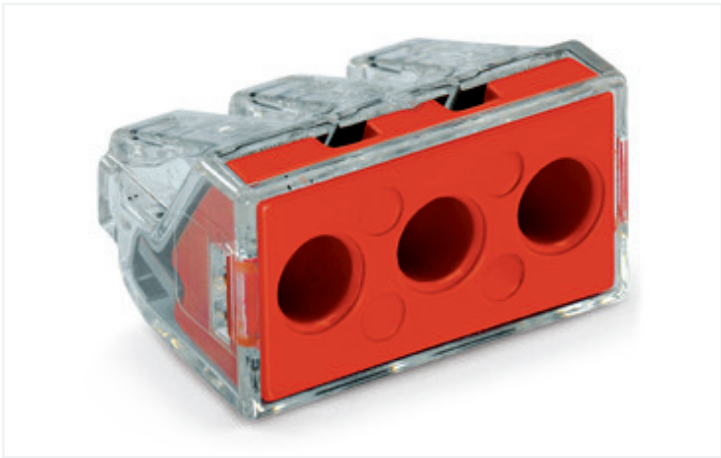

Color: ☐ multicoloured

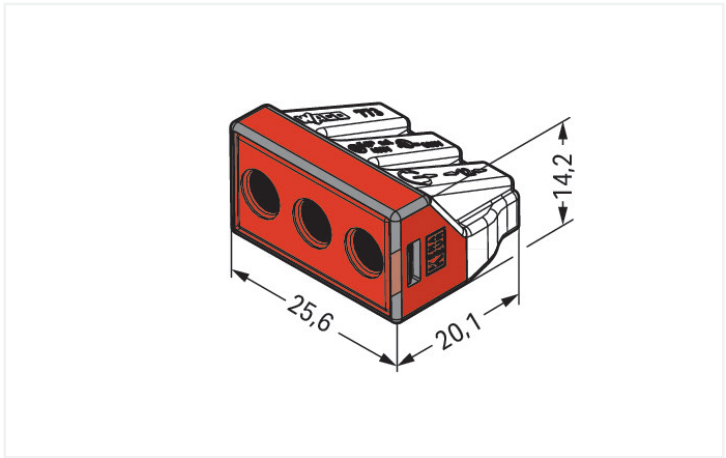

Dimensions in mm

Notes

Safety information 1	in grounded power lines
----------------------	-------------------------

Electrical data

Ratings per IEC/EN	
Ratings per	IEC/EN 60664-1
Nominal voltage (III/2)	400 V
Rated surge voltage (III/2)	4 kV
Rated current	41 A
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2

Connection data

Connection points	3
Total number of potentials	1

Connection 1	
Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper Aluminum

Connection 1

Connectable conductor materials (note)

Terminating Aluminum Conductors

WAGO spring clamp terminal blocks are suitable for solid aluminum conductors up to 4 mm²/12 AWG if WAGO "Alu-Plus" Contact Paste [249-130](https://www.wago.com/249-130) is used for termination.

"Alu-Plus" Contact Paste Advantages:

- Automatically destroys the oxide film during clamping.
- Prevents fresh oxidation at the clamping point.
- Prevents electrolytic corrosion between aluminum and copper conductors (in the same terminal block).
- Provides long-term protection against corrosion.

For spring clamp connections with PUSH WIRE® connection technology, **WAGO recommends that the aluminum conductor first be cleaned** and then immediately inserted into the clamping unit filled with "Alu-Plus" contact paste.

It is also possible to apply WAGO "Alu-Plus" **additionally** on the whole surface of the aluminum conductor before termination.

Please note that the nominal currents must be adapted to the reduced conductivity of the aluminum conductors::

2.5 mm² = 16 A

4 mm² = 22 A

Solid conductor	2.5 ... 6 mm ² / 14 ... 10 AWG
-----------------	---

Wiring direction	Side-entry wiring
------------------	-------------------

Physical data

Width	25.6 mm / 1.008 inches
-------	------------------------

Material Data

Note (material data)

[Information on material specifications can be found here](#)

Color	multicoloured
-------	---------------

Cover color	red
-------------	-----

Flammability class per UL94	V2
-----------------------------	----

Fire load	0.115 MJ
-----------	----------

Weight	5.8 g
--------	-------

Commercial data

eCl@ss 10.0	27-14-11-04
-------------	-------------

eCl@ss 9.0	27-14-11-04
------------	-------------

ETIM 8.0	EC000446
----------	----------

ETIM 7.0	EC000446
----------	----------

PU (SPU)	500 (50) pcs
----------	--------------

Packaging type	Box
----------------	-----

Country of origin	CN
-------------------	----

GTIN	4050821215141
------	---------------

Customs tariff number	85369010000
-----------------------	-------------



General approvals



Approval	Standard	Certificate Name
CSA DEKRA Certification B.V.	C22.2	15411 (LR46759)
ENEC 15 UL International Germany GmbH	EN 60998	ENEC-01207
UL UL International Germany GmbH	UL 486C	E69654

Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	18-HG1755093-PDA

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 773-173



Documentation

Bid Text			
773-173	19.02.2019	xml 3.24 KB	
773-173	17.05.2017	doc 25.00 KB	
ausschreiben.de 773-173			

CAD/CAE-Data

CAD data
2D/3D Models 773-173



CAE data
EPLAN Data Portal 773-173
WSCAD Universe 773-173
ZUKEN Portal 773-173



1 Compatible Products

1.1 Optional Accessories

1.1.1 Mounting adapter

1.1.1.1 Mounting accessories



Item No.: 773-332

Mounting carrier; 773 Series - 2.5 mm² / 4 mm² / 6 mm²; for DIN-35 rail mounting / screw mounting; orange

1.1.2 Tool

1.1.2.1 "Alu-Plus" contact paste



Item No.: 249-130

Syringe; Contents: 20 ml Alu-Plus contact paste