

Monsoon UMD Pro Mixed Flow Fans

- High extraction rate 300 - 576m³/h
- Aerodynamic case and diffuser for powerful pressure at low noise
- High-efficient two speed ball bearing motor, 40,000 hour service life
- Complete with mounting plate, can be mounted at any angle
- Suitable for mounting in parallel or in series
- Quick release impeller and motor block, easy maintenance



CODE	DESCRIPTION
UMD100SX	100mm Mixed Flow Standard Fan (300m³/h)
UMD100TX	100mm Mixed Flow Timer Fan (300m³/h)
UMD125SX	125mm Standard In-line Fan (324m³/h)
UMD125TX	125mm Timer In-line Fan (324m³/h)
UMD150SX	150mm Standard In-line Fan (576m³/h)
UMD150TX	150mm Timer In-line Fan (576m³/h)


Please see page 64 for larger models.

Technical data

	UMD100 PRO		UMD125 PRO		UMD150 PRO	
	LOW	HIGH	LOW	HIGH	LOW	HIGH
Power (W)	23	25	30	20	40	50
Current (A)	0.1	0.11	0.1	0.12	0.17	0.21
Airflow (m³/h)	201	300	197	324	381	576
Sound @ 3m dB(A)	18	24	19	27	31	37
Max temperature	60	60	60	60	60	60
IP rating	IP44	IP44	IP44	IP44	IP44	IP44

Dimensions (mm)

MODEL	H	W	L	ØD
UMD100 Pro	220	178	298	97
UMD125 Pro	220	178	259	122
UMD150 Pro	256	200	350	147

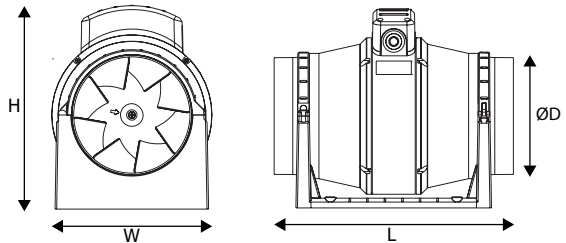

Performance

