



# WL95

IP65 CCT & wattage switchable bulkhead with white housing & conduit entries

## Features

|                  |                      |
|------------------|----------------------|
| IK rating        | IK10                 |
| IP rating        | IP65                 |
| CSP Switchable   | Colour switchable    |
| Sensor Option    | Microwave (Step-Dim) |
| Dimmable Option  | No                   |
| LED Lifetime     | 35,000h L70          |
| CRI              | 80 Ra                |
| Emergency Option | Yes                  |

## Installation information

|                             |                         |
|-----------------------------|-------------------------|
| Install Connector Type      | 4 ways, push-fit        |
| UK Bathroom Zone            | 2                       |
| Inrush Current              | 10A 50s                 |
| Construction Material       | ABS housing PC diffuser |
| Weight                      | 850g                    |
| Maximum Ambient Temperature | -20° to 40°C            |
| Electric Class (1, 2, 3)    | 2                       |

## Wiring information

|                         |                                                   |
|-------------------------|---------------------------------------------------|
| Cable / Flying Lead     | Push-fit terminals, 1.5mm² max, loop-in/loop-out. |
| Type of Wiring Required | Parallel                                          |

## Accessories

|         |                        |                 |
|---------|------------------------|-----------------|
| WL95BEW | White Eyelid Accessory | Sold Separately |
|---------|------------------------|-----------------|



collingwood

01604 495 151  
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

## Guarantee

3 years



## Features & benefits

- CCT switchable between 3000K, 4000K & 6500K
- Wattage switchable between 10W & 15W
- Emergency option available
- Slimline design
- Multiple mounting options: BESA box, M20 conduit, cable glands
- IP65 rated, making it perfect for using outdoors
- High efficacy of 120lm/W
- Multiple black bezel options available
- Easy access push fit screwless terminals
- Microwave step-dim dusk-dawn sensor, which is programmable by dip switches, saving energy by having it on only when needed

Light source  
energy efficiency:



Beam angle: 115°

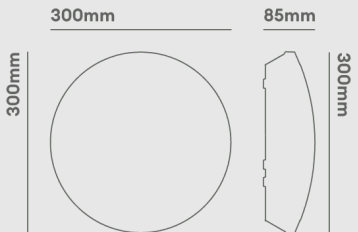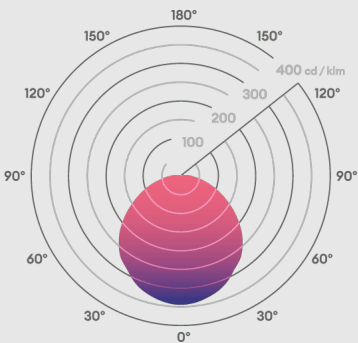



collingwood

## Photometrics @ 25°C

| Product code | Finish | Feature I               | W   | Colour | Beam | lm   | lm/W | lx @ 1m | EM  |
|--------------|--------|-------------------------|-----|--------|------|------|------|---------|-----|
| WL9515SCS    | White  | Standard                | 10W | 3000K  | 115° | 1100 | 110  | 364     | -   |
| WL9515SCS    | White  | Standard                | 10W | 4000K  | 115° | 1200 | 120  | 397     | -   |
| WL9515SCS    | White  | Standard                | 10W | 6500K  | 115° | 1200 | 120  | 397     | -   |
| WL9515SCS    | White  | Standard                | 15W | 3000K  | 115° | 1650 | 110  | 546     | -   |
| WL9515SCS    | White  | Standard                | 15W | 4000K  | 115° | 1800 | 120  | 596     | -   |
| WL9515SCS    | White  | Standard                | 15W | 6500K  | 115° | 1800 | 120  | 596     | -   |
| WL9515MCS    | White  | Microwave Sensor        | 10W | 3000K  | 115° | 1100 | 110  | 364     | -   |
| WL9515MCS    | White  | Microwave Sensor        | 10W | 4000K  | 115° | 1200 | 120  | 397     | -   |
| WL9515MCS    | White  | Microwave Sensor        | 10W | 6500K  | 115° | 1200 | 120  | 397     | -   |
| WL9515MCS    | White  | Microwave Sensor        | 15W | 3000K  | 115° | 1650 | 110  | 546     | -   |
| WL9515MCS    | White  | Microwave Sensor        | 15W | 4000K  | 115° | 1800 | 120  | 596     | -   |
| WL9515MCS    | White  | Microwave Sensor        | 15W | 6500K  | 115° | 1800 | 120  | 596     | -   |
| WL9515ECS    | White  | Emergency               | 10W | 3000K  | 115° | 1100 | 110  | 364     | 120 |
| WL9515ECS    | White  | Emergency               | 10W | 4000K  | 115° | 1200 | 120  | 397     | 120 |
| WL9515ECS    | White  | Emergency               | 10W | 6500K  | 115° | 1200 | 120  | 397     | 120 |
| WL9515ECS    | White  | Emergency               | 15W | 3000K  | 115° | 1650 | 110  | 546     | 120 |
| WL9515ECS    | White  | Emergency               | 15W | 4000K  | 115° | 1800 | 120  | 596     | 120 |
| WL9515ECS    | White  | Emergency               | 15W | 6500K  | 115° | 1800 | 120  | 596     | 120 |
| WL9515CCS    | White  | Microwave and Emergency | 10W | 3000K  | 115° | 1100 | 110  | 364     | 120 |
| WL9515CCS    | White  | Microwave and Emergency | 10W | 4000K  | 115° | 1200 | 120  | 397     | 120 |
| WL9515CCS    | White  | Microwave and Emergency | 10W | 6500K  | 115° | 1200 | 120  | 397     | 120 |
| WL9515CCS    | White  | Microwave and Emergency | 15W | 3000K  | 115° | 1650 | 110  | 546     | 120 |
| WL9515CCS    | White  | Microwave and Emergency | 15W | 4000K  | 115° | 1800 | 120  | 596     | 120 |
| WL9515CCS    | White  | Microwave and Emergency | 15W | 6500K  | 115° | 1800 | 120  | 596     | 120 |
| WL9515SCSB   | Black  | Standard                | 10W | 3000K  | 115° | 1100 | 110  | 364     | -   |
| WL9515SCSB   | Black  | Standard                | 10W | 4000K  | 115° | 1200 | 120  | 397     | -   |
| WL9515SCSB   | Black  | Standard                | 10W | 6500K  | 115° | 1200 | 120  | 397     | -   |
| WL9515SCSB   | Black  | Standard                | 15W | 3000K  | 115° | 1650 | 110  | 546     | -   |
| WL9515SCSB   | Black  | Standard                | 15W | 4000K  | 115° | 1800 | 120  | 596     | -   |
| WL9515SCSB   | Black  | Standard                | 15W | 6500K  | 115° | 1800 | 120  | 596     | -   |
| WL9515ECSB   | Black  | Emergency               | 10W | 3000K  | 115° | 1100 | 110  | 364     | 120 |
| WL9515ECSB   | Black  | Emergency               | 10W | 4000K  | 115° | 1200 | 120  | 397     | 120 |
| WL9515ECSB   | Black  | Emergency               | 10W | 6500K  | 115° | 1200 | 120  | 397     | 120 |
| WL9515ECSB   | Black  | Emergency               | 15W | 3000K  | 115° | 1650 | 110  | 546     | 120 |
| WL9515ECSB   | Black  | Emergency               | 15W | 4000K  | 115° | 1800 | 120  | 596     | 120 |
| WL9515ECSB   | Black  | Emergency               | 15W | 6500K  | 115° | 1800 | 120  | 596     | 120 |
| WL9515MCSB   | Black  | Microwave Sensor        | 10W | 3000K  | 115° | 1100 | 110  | 364     | -   |
| WL9515MCSB   | Black  | Microwave Sensor        | 10W | 4000K  | 115° | 1200 | 120  | 397     | -   |
| WL9515MCSB   | Black  | Microwave Sensor        | 10W | 6500K  | 115° | 1200 | 120  | 397     | -   |
| WL9515MCSB   | Black  | Microwave Sensor        | 15W | 3000K  | 115° | 1650 | 110  | 546     | -   |

01604 495 151  
collingwoodlighting.com

 collingwoodled

 /collingwoodlighting

 collingwoodlighting

## WL95

Bulkheads are a simple yet functional product that offer a practical solution for lighting commercial spaces, corridors and stairways, as well as indoor and outdoor communal spaces. With a high efficacy and a choice of two lumen levels, this easy install, colour switchable light is a robust and durable option.