



WL94

IP44 LED slim decorative Bulkhead

Features

IK rating	IK07
IP rating	IP44
CSP Switchable	Colour switchable
Sensor Option	Microwave (Step-Dim)
Dimmable Option	No
LED Lifetime	35,000h L70
CRI	80 Ra
Emergency Option	Yes

Installation information

Install Connector Type	4 ways, push-fit
UK Bathroom Zone	2
Inrush Current	9.8A 50s
Construction Material	Polycarbonate galvanized steel bracket
Weight	830g
Maximum Ambient Temperature	-20° to 40°C
Electric Class (1, 2, 3)	2

Wiring information

Cable / Flying Lead	Push-fit terminals 1.5mm² max.
Type of Wiring Required	Parallel

Accessories

No accessories required



01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

3 years

Features & benefits

CCT switchable between 3000K, 4000K & 6500K

Quick and easy installation bracket

Emergency option available

High efficacy of 111lm/W

IP44 rating: suitable for use in kitchens and bathrooms.

Diffuser design makes a halo effect on the wall or ceiling

<https://media.onetimepim.com/acc-7/media/0/5/wl94-ip44-white-angle04-1200x960.jpg>

Innovative clip-on bracket design

Straight to mains

Microwave step-dim dusk-dawn sensor, which is programmable by dip switches, saving energy by having it on only when needed

Light source energy efficiency:



A

t

G

E

Beam angle: 120°

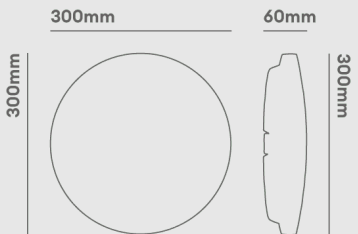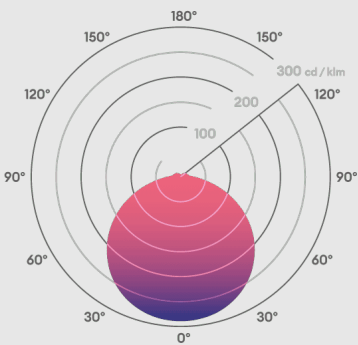

Photometrics @ 25°C

Product code	Finish	Feature I	W	Colour	Beam	lm	lm/W	lx @ 1m	EM
WL9410SCS	White	Standard	10W	3000K	120°	1000	100	288	-
WL9410SCS	White	Standard	10W	4000K	120°	1100	110	317	-
WL9410SCS	White	Standard	10W	6500K	120°	1100	110	317	-
WL9410ECS	White	Emergency	10W	3000K	120°	1000	100	288	220
WL9410ECS	White	Emergency	10W	4000K	120°	1100	110	317	220
WL9410ECS	White	Emergency	10W	6500K	120°	1100	110	317	220
WL9410MCS	White	Microwave Sensor	10W	3000K	120°	1000	100	288	-
WL9410MCS	White	Microwave Sensor	10W	4000K	120°	1100	110	317	-
WL9410MCS	White	Microwave Sensor	10W	6500K	120°	1100	110	317	-
WL9410CCS	White	Microwave and Emergency	10W	3000K	120°	1000	100	288	220
WL9410CCS	White	Microwave and Emergency	10W	4000K	120°	1100	110	317	220
WL9410CCS	White	Microwave and Emergency	10W	6500K	120°	1100	110	317	220
WL9418SCS	White	Standard	18W	3000K	120°	1800	100	518	-
WL9418SCS	White	Standard	18W	4000K	120°	2000	111	576	-
WL9418SCS	White	Standard	18W	6500K	120°	2000	111	576	-
WL9418ECS	White	Emergency	18W	3000K	120°	1800	100	518	220
WL9418ECS	White	Emergency	18W	4000K	120°	2000	111	576	220
WL9418ECS	White	Emergency	18W	6500K	120°	2000	111	576	220
WL9418MCS	White	Microwave Sensor	18W	3000K	120°	1800	100	518	-
WL9418MCS	White	Microwave Sensor	18W	4000K	120°	2000	111	576	-
WL9418MCS	White	Microwave Sensor	18W	6500K	120°	2000	111	576	-
WL9418CCS	White	Microwave and Emergency	18W	3000K	120°	1800	100	518	220
WL9418CCS	White	Microwave and Emergency	18W	4000K	120°	2000	111	576	220
WL9418CCS	White	Microwave and Emergency	18W	6500K	120°	2000	111	576	220



collingwood

01604 495 151
collingwoodlighting.com

 collingwoodled

 /collingwoodlighting

 collingwoodlighting

WL94

The IP44 bulkhead range is designed and developed for use as a general purpose fitting and commonly used in kitchens, bathrooms, corridors and stairwells. The product is colour switchable via a switch under the back cover, with 3000K, 4000K and 6500K options. Microwave sensor and emergency pack options are also available, further extending the scope of suitable installation environments.