

wall mounting socket outlet, switched, interlocked - housing dimensions 170x90



Product description	
BALS-Prd.-Nr	16167
EAN	4024941161671
Product group	Quick-Connect wall mounting socket outlet, switched, interlocked
Current	16A
Number of poles	3p
Arrangement of the phases	2P+PE
Earth 'clock' position	6 h
Voltage	200 up to 250V


Product description	
Frequency	50 and 60Hz
Protection degree	IP44
Colour code	blue
Colour of appliance	Hinged lid blue, Housing bottom grey, Housing top grey, Control knob grey
Connection design	screwless spring terminals as cage clamp with Kontext-contact
Maximum conductor size	4,0 qmm
Cable entry	top entry M20 bottom entry M25/20
Dimension of enclosure	170x90 mm (HxW)
Material of enclosure	Polycarbonate

Additional technical information	
	The cable entry is one at top open and two at bottom closed
	In 0-position lockable for 3 padlocks with bow diameter up to 7 mm, Lower part of housing rotatable by 180°

Logistics data	
Weight/pcs	0.625 kg / piece
Packaging	carton
Content amount	1 ST
EAN	4024941161671
Length	205 mm

Logistics data

Width	102 mm
Height	134 mm
Weight	0.685 kg
Volume	2,118.48 ccm

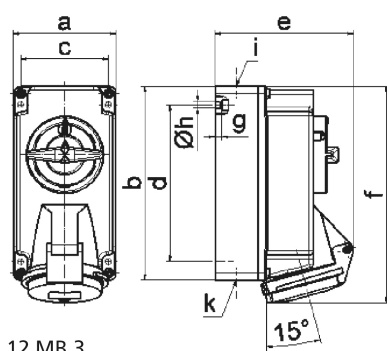

Ampere	16	16	16			
Polzahl	3	4	5			
a	90,0	90,0	90,0			
b	170,0	170,0	170,0			
c	77,0	77,0	77,0			
d	137,5	137,5	137,5			
e	108,0	114,0	121,0			
f	188,5	188,5	190,0			
g	6,0	6,0	6,0			
h ø	5,5	5,5	5,5			
i	M20	M20	M20			
k	M20/25	M20/25	M20/25			