


wall mounting socket outlet, switched, interlocked - housing dimensions 225x118



Product description	
BALS-Prd.-Nr	16201
EAN	4024941162012
Product group	Quick-Connect wall mounting socket outlet, switched, interlocked
Current	32A
Number of poles	4p
Arrangement of the phases	3P+PE
Earth 'clock' position	6 h
Voltage	380 up to 415V

Product description	
Frequency	50 and 60Hz
Protection degree	IP44
Colour code	red
Colour of appliance	Hinged lid red, Housing screws grey, Housing bottom grey, Housing top grey, Control knob grey
Connection design	screwless spring terminals as cage clamp with Kontext-contact
Cable entry	1x Top entry M25 2x Bottom entry M25
Dimension of enclosure	225x118 mm (HxW)
Material of enclosure	Polycarbonate
Contacts	the contacts are brass nickel plated

Logistics data	
Weight/pcs	1.015 kg / piece
Packaging	carton
Content amount	1 ST
EAN	4024941162012
Length	275 mm
Width	175 mm
Height	137 mm
Weight	1.14 kg
Volume	5,737.5 ccm

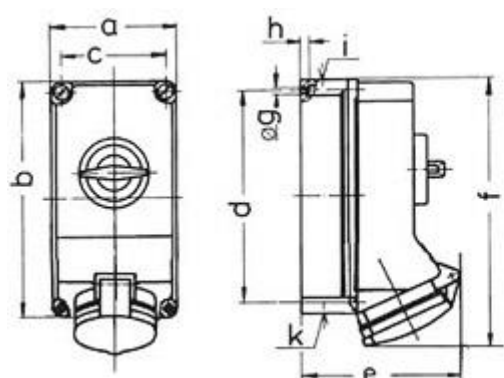

Amperes
Poles

a
b
c
d
e
f
g
h
i
k

3	32 4	5
118	118	118
225	225	225
101	101	101
208	208	208
137	137	144
251	251	251
6.5	6.5	6.5
8	8	8
1x M25	1x M25	1x M25
2x M25	2x M25	2x M25