


wall mounting socket outlet - housing dimensions 170x90



Product description	
BALS-Prd.-Nr	16186
EAN	4024941161862
Product group	Quick-Connect wall mounting socket outlet, switched, interlocked
Current	16A
Number of poles	5p
Arrangement of the phases	3P+N+PE
Earth 'clock' position	6 h
Voltage	200/346 up to 240/415V
Frequency	50 and 60Hz

Product description	
Protection degree	IP67
Colour code	red
Colour of appliance	Hinged lid red, Bayonet ring grey, Housing bottom grey, Housing top grey, Control knob grey
Connection design	screwless spring terminals as cage clamp with Kontext-contact
Maximum conductor size	4,0 qmm
Cable entry	top entry M20 bottom entry M25/20
Dimension of enclosure	170x90 mm (HxW)
Material of enclosure	Polycarbonate
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Logistics data	
Weight/pcs	0.644 kg / piece
Packaging	carton
Content amount	1 ST
EAN	4024941161862
Length	205 mm
Width	102 mm
Height	134 mm
Weight	0.704 kg
Volume	2,118.48 ccm

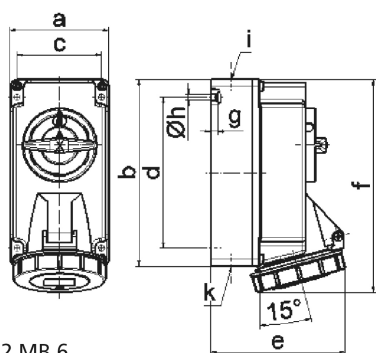

12 MB 6

Ampere	16	16	16			
Polzahl	3	4	5			
a	90,0	90,0	90,0			
b	170,0	170,0	170,0			
c	77,0	77,0	77,0			
d	137,5	137,5	137,5			
e	108,0	115,0	121,0			
f	191,5	191,5	191,5			
g	6,0	6,0	6,0			
h ø	5,5	5,5	5,5			
i	M20	M20	M20			
k	M20/25	M20/25	M20/25			