
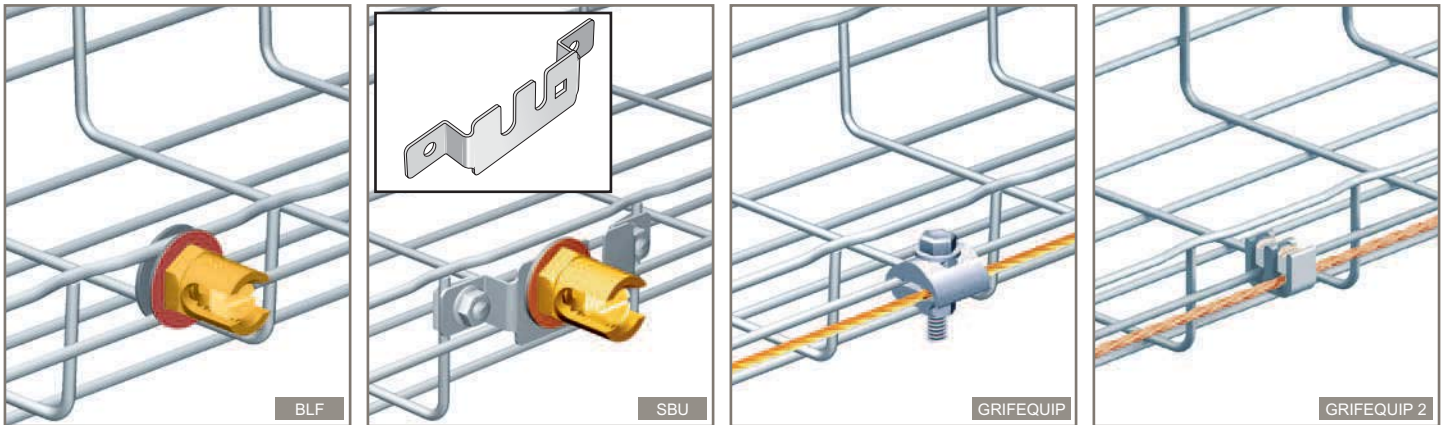





Dimensions and technical information p. 108-109

NOTE : please use Cat. No. when placing your order

Pack	Cat. Nos.	Earth conductor clamps	Pack	Cat. Nos.	Earth conductor clamps (continued)
		BLF – earth conductor clamp (copper) ⌈⌋ 30 → 150 ⌈⌋ 50 → 600 mm For technical information see p. 108			GRIFEQUIP – earth conductor clamp (aluminium) ⌈⌋ 30 → 150 ⌈⌋ 50 → 600 mm Not suitable for use with stainless steel For technical information see p. 109
10	CU CM585387	L mm Ø mm² BLF 6/16 19 16	1	AL CM585327	
10	CM585397	BLF 6/35 22 35			
10	CM585407	BLF 6/50 25 50			
		SBU – earth conductor clamp support ⌈⌋ 30 → 150 ⌈⌋ 50 → 600 mm For technical information see p. 109			GRIFEQUIP 2 – vertical clamp (aluminium) ⌈⌋ 30 → 150 ⌈⌋ 50 → 600 mm Not suitable for use with stainless steel For technical information see p. 109
10	GS GC 316L CM585090 CM585093 CM585094		1	AL CM585427	

Key: GS Pre-galvanised	AL Aluminium
GC Hot dip galvanised after manufacture	CU Copper
316L Stainless steel 316 L	For detailed information related to finishes, refer to p. 132-133

All dimensions (mm) are nominal