

Technical Data

CE¹⁵
0905
DoP0026
DoP0027


EN54-11:2001 + A1:2006 + AC1:2006

Specification


Supply voltage	18~35 Vdc
Cable size/type	0.28~2.5mm ² cable shall comply with applicable standard
Standby current	<22μA
Alarm current	20mA pulsed
Low level alarm current	1mA steady
Operating temperature (indoor)	-10 to +55°C (95%RH)
Operating temperature (WP)	-25 to +70°C (95%RH)
Material	ABS FR plastic
Environmental category	Indoor= IP21C/ WP= IP66
LED indicator	Red
System compatibility	Eaton BiWire Ultra

Note: There are no serviceable parts therefore no maintenance required.



CallPoint

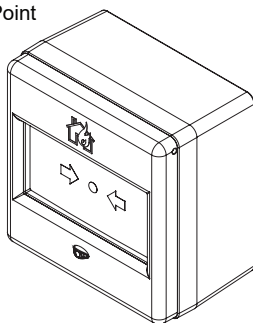



CallPoint weatherproof (WP)





Exploded view (indoor)

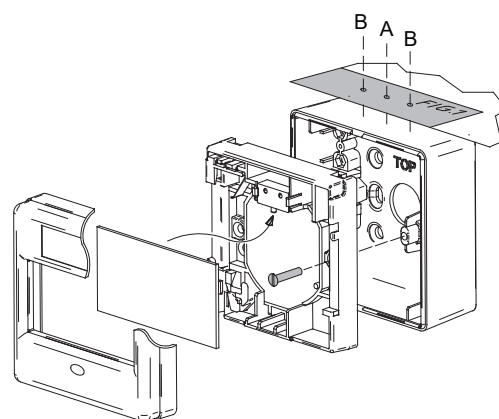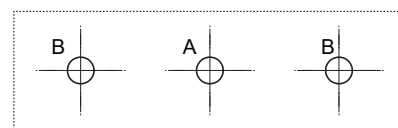


Call Point indoor (Type A)

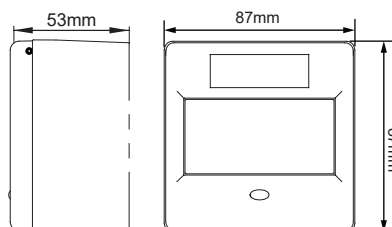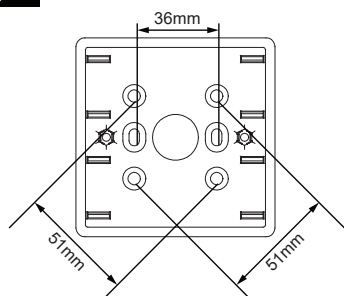

Call Point weatherproof (Type A)

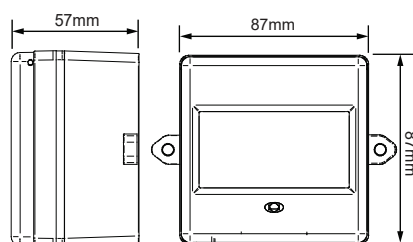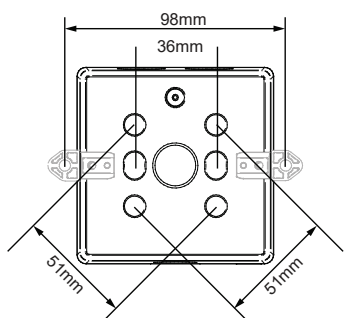


Exploded view (WP)

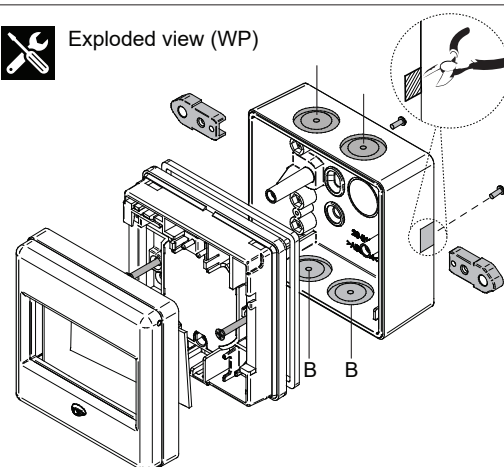

EAT•N



Powering Business Worldwide

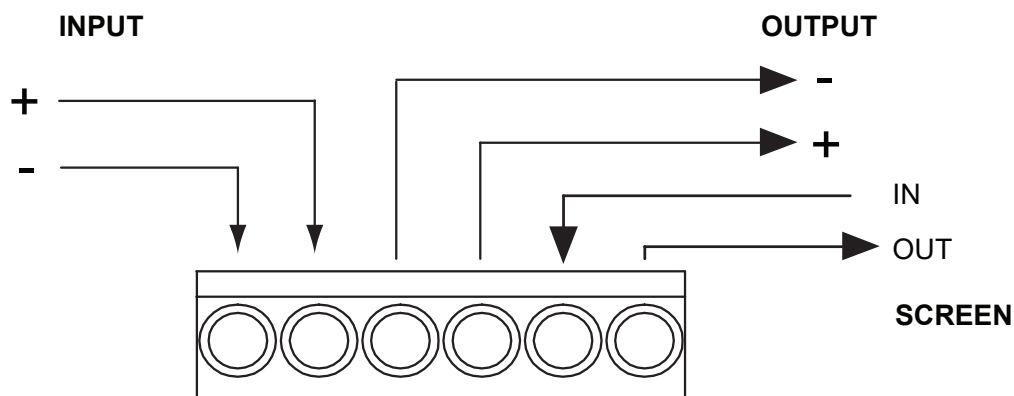


Removing front cover

CallPoint


CallPoint weatherproof (WP)

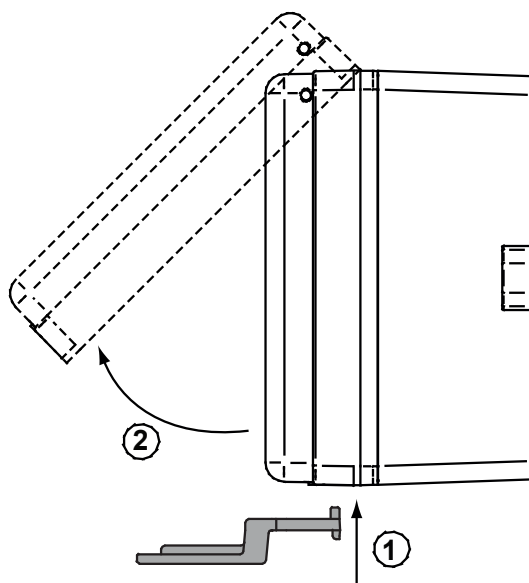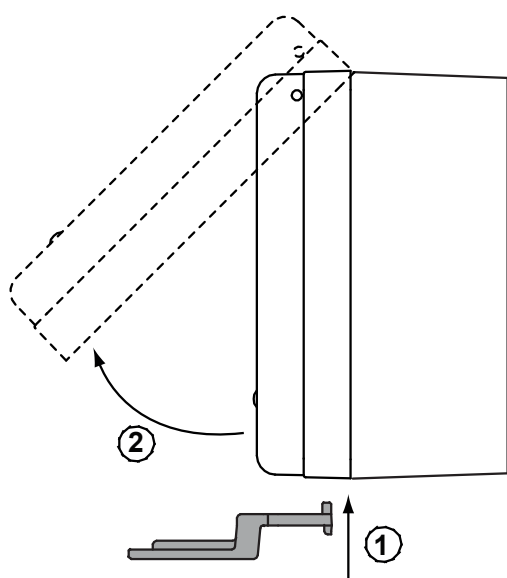

Accessories

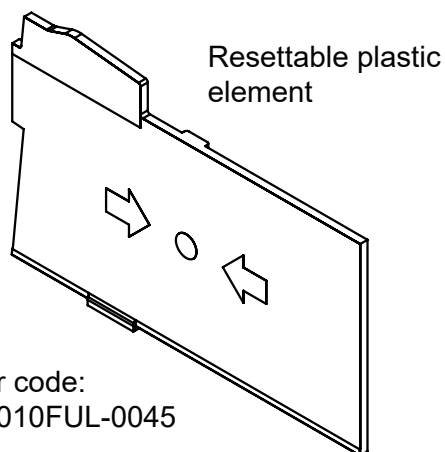

Order code:
4990010FUL-0045
(Pack of 10)

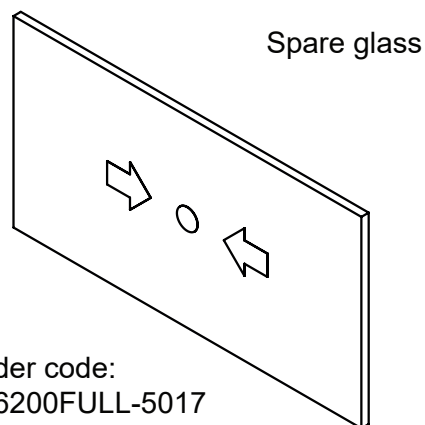

Order code:
516200FULL-5017
(Pack of 10)