


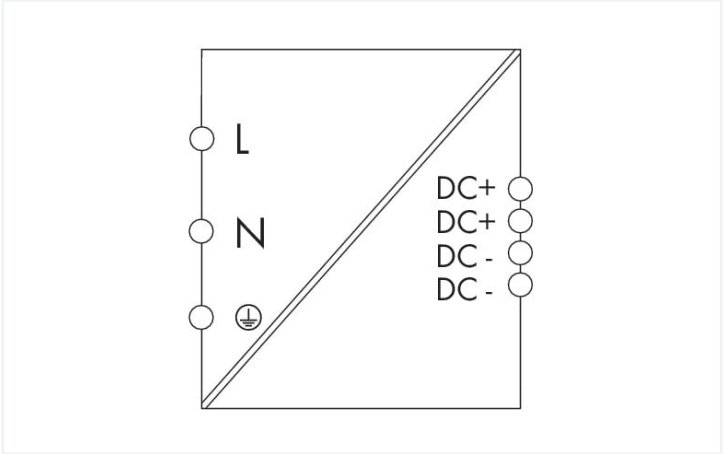

- Features:**
- Switched-mode power supply
 - Natural convection cooling when horizontally mounted
 - Encapsulated for use in control cabinets
 - Suitable for both parallel and series operation
 - Electrically isolated output voltage (SELV) per UL 60950-1; PELV per EN 60204

Technical data			
Input		Output	
Phases	1	Nominal output voltage $U_{o\ nom}$	DC 24 V (SELV)
Nominal input voltage $U_{i\ nom}$	1 x AC 100 ... 240 V	Output voltage range	DC 22 ... 28 V (adjustable)
Input voltage range	1 x AC 90 ... 264 V; DC 90 ... 373 V	Default setting	DC 24 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz	Nominal output current $I_{o\ nom}$	5 A (24 VDC)
Input current I_i	≤ 1 A (230 VAC); ≤ 2 A (115 VAC)	Nominal output power	120 W
Discharge current	≤ 3.5 mA	Deviation	≤ 1 %
Inrush current	≤ 30 A	Residual ripple	≤ 100 mV (peak-to-peak)
Power factor	≥ 0.94 (230 VAC); ≥ 0.98 (115 VAC)	Overload behavior	Constant power (in overload range: 1.15 ... 1.4 x $I_{o\ nom}$); Shutdown and automatic restart in the event of a short circuit
Power factor correction (PFC)	active		
Mains failure hold-up time	≥ 20 ms (230 VAC)		

Signaling and communication		Efficiency/power losses	
Signaling	1 x LED DC OK (green) 1 x Overload LED (red)	Power loss P_I	≤ 19.5 W (230 VAC; nominal load)
Operation status indicator	Green LED (24 VDC OK) Red LED (overload)	Power loss (max.) $P_{I\ (max.)}$	23.5 W (110 VAC / 24 VDC; 5.5 A)
		Efficiency (typ.)	86 % (230 VAC)

Circuit protection	
Internal fuse	F 3.15 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 10 A, 16 A; Tripping characteristic: B or C



Safety and protection		
Isolation voltage (pri.-sec.)		DC 4.242 kV
Isolation voltage (pri.-PE)		DC 2.2 kV
Isolation voltage (sec.-PE)		DC 0.7 kV
Protection class		I
Protection type		IP20; per EN 60529
Resistance to reverse feed		≤ DC 28 V
Oversvoltage category		II
Pollution degree		2
Transient suppression (primary)		Varistor
Short-circuit-protected		Yes
Open-circuit-proof		Yes
Parallel operation		Yes
Series operation		Yes
MTBF		480,000 h (per IEC 61709)

Connection data		
Connection type 1		Input/output
Connection technology		CAGE CLAMP®
WAGO connector		WAGO 745 Series
Solid conductor		0.08 ... 4 mm² / 28 ... 12 AWG
Fine-stranded conductor		0.08 ... 4 mm² / 28 ... 12 AWG
Strip length		8 ... 9 mm / 0.31 ... 0.35 inches
Note (conductor cross-section)		12 AWG: THHN, THWN

Physical data		
Width		75 mm / 2.953 inches
Height		92 mm / 3.622 inches
Depth from upper-edge of DIN-rail		136 mm / 5.354 inches

Mechanical data		
Mounting type		DIN-35 rail

Material data		
Fire load		4.8 MJ
Weight		850 g

Environmental requirements		
Ambient temperature (operation)		-10 ... +60 °C
Ambient temperature (storage)		-25 ... +85 °C
Relative humidity		≤ 95% (no condensation permissible)
Derating		-5.33 %/K (> 45 °C; 230 VAC)



Standards and specifications	
Conformity marking	CE
Standards/specifications	EN 62368-1 EN 61204-3 cURus 60950-1 cULus 508 ANSI/ISA 12.12.01 (Class I Div. 2) ATEX IEC Ex

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4045454908188
Customs tariff number	85044083900

Approvals / Certificates		
General approvals		
 		
Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 508	E255817
UL Underwriters Laboratories Inc.	UL 60950-1	E255815
Approvals for hazardous areas		
  		
Approval	Standard	Certificate Name
ATEX UL International Demko A/S	EN 60079-0	12 ATEX 0931267 X
INMETRO TÜV Rheinland do Brasil Ltda.	IEC 60079	TÜV20.1339X
UKEx WAGO GmbH & Co. KG	EN 60079-0	WAGO22UKEX001X_ec nC T4
UL UL International Germany GmbH	IEC 60079-0	IECEX UL 10.0006 X
UL UL International Germany GmbH (HAZARDOUS LOCATIONS)	ANSI/ISA 12.12.01	E198726 Section 5

Downloads
Environmental Product Compliance



Compliance Search			
Environmental Product Compliance 787-722			

Documentation							
Bid Text				Instruction Leaflet			
787-722	12.07.2019	xml 6.85 KB		CCC Ex (Additional information)		pdf 127.27 KB	
787-722	12.07.2019	docx 21.09 KB		Primary Switch Mode Power Supply ECO-Power	V 2.2.10 21.12.2020	pdf 229.55 KB	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 787-722		EPLAN Data Portal 787-722	
		WSCAD Universe 787-722	
		ZUKEN Portal 787-722	

1 Compatible Products	
1.1 Optional Accessories	
1.1.1 Tool	
1.1.1.1 Operating tool	



[Item No.: 210-720](#)
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[Item No.: 210-769](#)
SCREWDRIVER; green