

LED Backlit Panel

Wattage Available

34W

50W



ECOLINK



IP20



UGR19 TPa



30,000 hours



Max 35°C, Min -10°C




IK02



Indoor

	Lumen (lm)	CCT (K)	P (W) with driver	Order number
RC007B 34S / 840 PSU W60L60 NOC TPb	3400	4000	34	911401860484
RC007B 34S / 840 PSU W60L60 OC TPa	3400	4000	34	911401860584
RC007B 34S / 840 PSU W30L120 OC TPa	3400	4000	34	9114011860684
RC007B 60S / 840 PSU W60L120 NOC TPb	6000	4000	50	911401860784

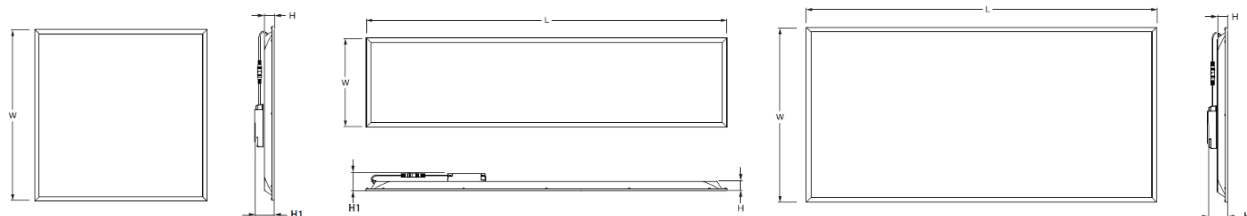

	LxW (mm)	H (mm)	H1 (mm)	KG
RC007B 34S / 840 PSU W60L60 NOC TPb	595x595	34	59	1.60
RC007B 34S / 840 PSU W60L60 OC TPa	595x595	35	60	1.85
RC007B 34S / 840 PSU W30L120 OC TPa	1195x295	35	60	2.00
RC007B 60S / 840 PSU W60L120 NOC TPb	1195x295	34	59	3.80