

CEMBRE



Index

- Presentation
- Technical characteristics
- Media gallery
- List of products

LEGENDS

Code **MG-TAR**

precut

MG-TAR legends are often designed to fit particular components with a suitable clip-in or stickon location. Consult us for availability of other colours.



CERTIFICATES



LABORATORY TEST

CEI EN 60950-1

 INDELIBILITY

CEI EN 61010-1

 INDELIBILITY

CEMBRE STANDARD


 INDELIBILITY

DIN 30643

Technical characteristics

Min operating temperature range	-30 °C
Max operating temperature range	80 °C
UL94 class	V0
Material	Rigid PVC
Precut	yes

Media gallery

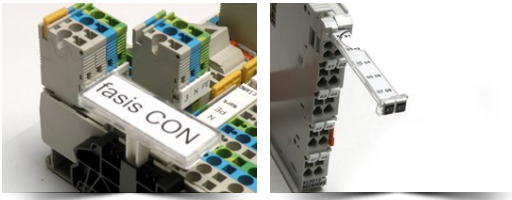

List of products

MG-TAR						
Type	Height	Length	Quantity per sheet	Pack qty	SWcode	Colour
45384GY	6.3 mm	44 mm	30	750	798	Grey
45324	6.3 mm	44 mm	30	750	798	Red
45364	6.3 mm	44 mm	30	750	798	Blue
45098	7.5 mm	40 mm	24	1,200	801	White
45048	7.5 mm	40 mm	24	1,200	801	Yellow
45490	8.5 mm	30 mm	33	1,650	720	White
45335	7.5 mm	30 mm	33	1,650	850	White

CEMBRE

- Corporate information
- Certifications
- Investor relations
- Work with us

HELP

- Customer service
- Find Cembre nearest you
- Printing systems support
- Site map

NOTES AND LEGAL INFORMATION

- Privacy policy
- Disclaimers
- Imprint

CEMBRE ON THE WEB