



Caiman CSP 5ft Twin

CCT Colour Switchable

Features

IK rating	IK08
IP rating	IP65
CSP Switchable	CCT Switchable
Sensor Option	On-Off Microwave sensor & daylight switching available
Dimmable Option	DALI-2 and 0-10V Dimmable
LED Lifetime	50,000h L70
CRI	80 Ra
SDCM	4 SDCM
Emergency Option	Yes

Installation information

Install Connector Type	Loop in / Loop out
Inrush Current	30A 0.3ms
Construction Material	Anti-UV Polycarbonate
Maximum Ambient Temperature	-20°C to +40°C
SELV	Yes
UK Building Regulations	Part P
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	Feature I	W	Colour	Beam	lm	lm/W	EM
AC5TN	Grey RAL7005	Standard	50W	3000K - 4000K - 6500K	120°	5750lm - 6500lm - 6250lm	115lm/W - 130lm/W - 125lm/W	N/A
AC5TNE	Grey RAL7005	Emergency	50W	3000K - 4000K - 6500K	120°	5750lm - 6500lm - 6250lm	115lm/W - 130lm/W - 125lm/W	250lm
AC5TNM	Grey RAL7005	On-Off Microwave Sensor	50W	3000K - 4000K - 6500K	120°	5750lm - 6500lm - 6250lm	115lm/W - 130lm/W - 125lm/W	N/A
AC5TNME	Grey RAL7005	Emergency	50W	3000K - 4000K - 6500K	120°	5750lm - 6500lm - 6250lm	115lm/W - 130lm/W - 125lm/W	250lm
AC5TV	Grey RAL7005	0-10V Dimmable	50W	3000K - 4000K - 6500K	120°	5750lm - 6500lm - 6250lm	115lm/W - 130lm/W - 125lm/W	N/A
AC5TVE	Grey RAL7005	Emergency	50W	3000K - 4000K - 6500K	120°	5750lm - 6500lm - 6250lm	115lm/W - 130lm/W - 125lm/W	250lm
AC5TD	Grey RAL7005	DALI-2 Dimmable	50W	3000K - 4000K - 6500K	120°	5750lm - 6500lm - 6250lm	115lm/W - 130lm/W - 125lm/W	N/A
AC5TDE	Grey RAL7005	Emergency	50W	3000K - 4000K - 6500K	120°	5750lm - 6500lm - 6250lm	115lm/W - 130lm/W - 125lm/W	250lm

Wiring information

Cable Required for Connector	H05RN-F cable diameter 4 - 10mm, max conductor size 3x 1.5mm ²
Type of Wiring Required	Parallel



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled
 /collingwoodlighting
 collingwoodlighting

Guarantee

5 years, 2 years on battery, 2 years on-site

Features & benefits

CCT switchable between 3000K, 4000K & 6500K

Grade 316 Coastal protection kit available

BESA mounting kit available

IP65 for the highest level of dust protection and able to withstand jets of water from any directions

304 stainless steel clips for high corrosion resistance and anti-tamper screws for vandal proofing

IK08 for robust impact protection


Unique gear tray slots that allow us to easily integrate third party control gear for your project. Just ask.

Extended mounting sliders to help make refurbishment easier

Safety tether cable to gear tray enables fast installation

Compression cable gland included in fixings kit

Beam angle: 120°

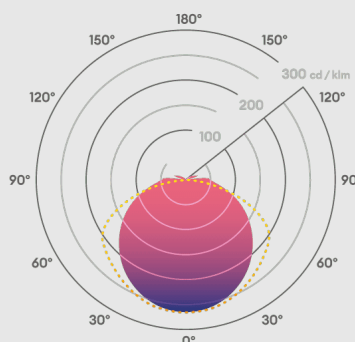

1545mm 93mm
80mm

Accessories

AC5TCLIP316	Coastal application kit	Sold Separately
ACTBESA	BESA mounting kit (indoor only)	Sold Separately
EMBOLTMOPEN	3 hour emergency conversion pack, open area, manual test	Sold Separately
EMBOLTMCOR	3 hour emergency conversion pack, corridor area, manual test	Sold Separately
SSENPBSTWH	PIR on/off daylight Sensor	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

 [collingwoodled](https://www.instagram.com/collingwoodled)

 [/collingwoodlighting](https://www.facebook.com/collingwoodlighting)

 [collingwoodlighting](https://www.linkedin.com/company/collingwoodlighting)

Caiman CSP 5ft Twin

IP65 for the highest level of dust protection and able to withstand jets of water from all directions. 304 stainless steel clips for high corrosion resistance and anti-tamper screws for vandal proofing. IK08 for robust impact protection. Our Caiman anti-corrosive has been designed for the most demanding applications and features a colour temperature switch so you can choose for your light to be warm, cool or daylight. We also feature unique gear tray slots that allow us to easily integrate third party control gear for your project. Just ask.